

Postmaster Letterplate Installation Guide

The Yale Postmaster letterplate is designed for installation into timber, UPVC, composite and aluminium substrate materials

Features:


- Available in: Silver Anodised, White, Black, Polished Gold and Anodised Gold
- 12 inch all aluminium construction
- Panel and mid-rail fitting variants
- Range includes 20-40mm opening and 40-80mm opening
- Curved frame design



- Endurance tested to 20,000 cycles
- Corrosion tested to (96hrs. NSST)



Routing Prep

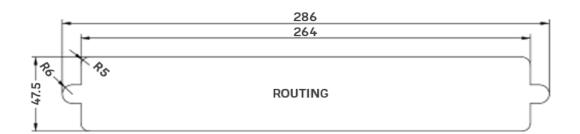

Fitting

- Position the Outer and Inner letterplate assemblies into the aperture.
- Lift the inner flap to access the screw holes.
- Secure in place using x2 M4 fixing screws provided.

Important: To avoid distortion and over-compression of the gasket please ensure the screws are not over tightened.

Yale DWS www.yaledws.co.uk ASSA ABLOY© Version 1.1 October 2023