



10 Year Mechanical Guarantee

Delivering peace of mind from the world's favourite lock company



BS EN 1670

British Standards Institute accredited anti-corrosion performance



PAS 24 Compliant

British Standards Institute accredited in security



Lifetime Security Guarantee*

Our Encloser Window Lock is included within our Lifetime Security Guarantee scheme; providing your customers with numerous benefits and peace of mind



Secured by Design

Police preferred specification accredited security product of the official UK police flagship initiative, supporting the principles of 'designing out crime'

THE YALE BRAND, with its unparalleled global reach and range of products, reassures more people in more countries than any other consumer locking solution.

THE ASSA ABLOY GROUP is the world's leading manufacturer and supplier of locking solutions, dedicated to satisfying end-user needs for security, safety and convenience.

August 2025 © ASSA ABLOY

Yale
School Street, Willenhall, West Midlands WV13 3PW, UK.
T: 01902 366800 F: 01902 369041
www.yaledws.co.uk

Due to a continuous programme of development the company reserves the right to make alterations without notice.
(Products which are not a stocked item will be subject to a longer lead time which needs to be agreed with your Yale representative).

*Terms and conditions apply. Please see yaledws.co.uk for further details.

Part of ASSA ABLOY

ASSA ABLOY



Encloser Window Lock

A high-performance lock solution.



- Bi-directional locking cams
- Suitable for use on uPVC, aluminium and timber
- Secured by Design accredited
- 10 year mechanical guarantee



Part of ASSA ABLOY

ASSA ABLOY

With innovative bi-directional locking technology, the Yale **Encloser Window Lock** has been designed to fit all uPVC window systems and offers the usual security credentials you would expect from the world’s most trusted lock manufacturer.

The innovative design offers Secured by Design security performance, combined with extremely fast fitting and no need for cropping. The Yale Encloser Window Lock is high performance, 'fast fit' and suitable for all sash sizes from 270mm to 1400mm.




Designed to meet the standards of PAS 24, the Encloser Window Lock is available with sash sizes up to 1400mm and is Secured by Design accredited, just a few more reasons why this lock is a fantastic choice.

Features

- Bi-directional locking cams
- Suitable for sash sizes ranging from 270mm to 1400mm
- Available in eight models covering two, four and six mushrooms
- Compression adjustable anti-separation mushroom cams work in pairs, locking into zinc alloy strikers
- Suitable for use on uPVC, Aluminium and Timber profiles


Guarantee and Standards

- Included in the Yale Lifetime Security Guarantee*
- Corrosion resistance to EN 1670:2007 Grade 4
- Endurance tested to BS EN 13156-4 Grade 5
- Designed to meet PAS 24:2016 requirements
- Secured by Design approved




Keeps

- Profile related keeps

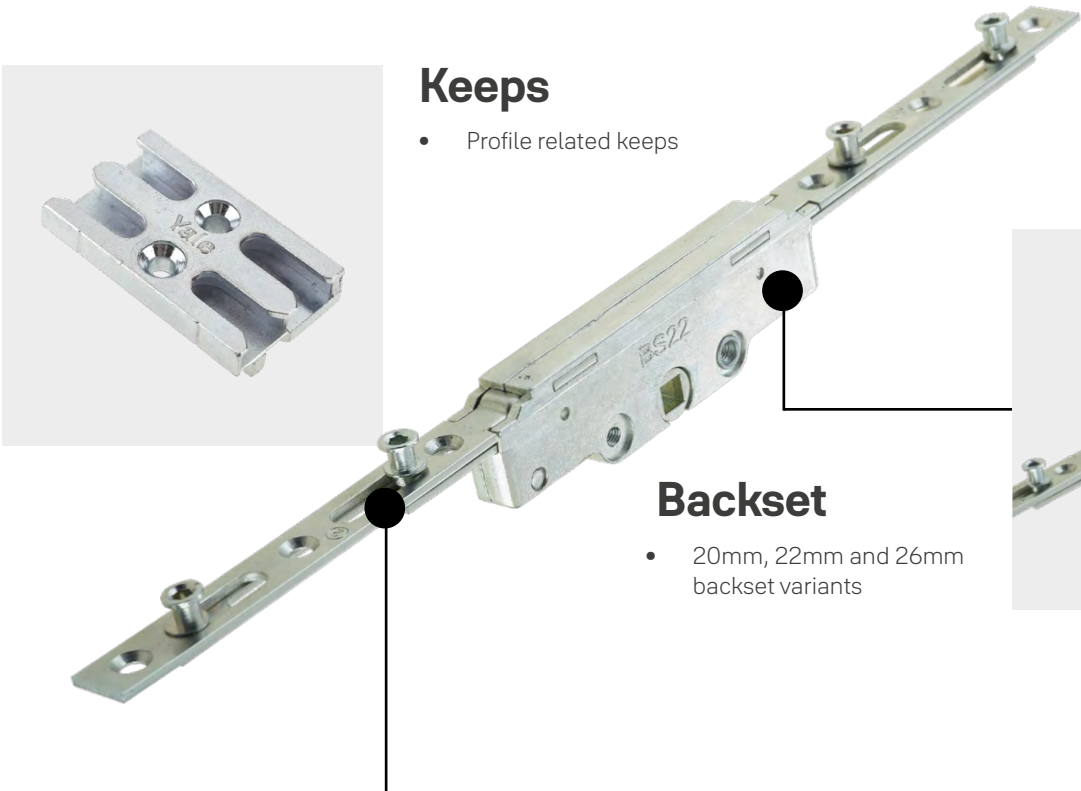

Backset

- 20mm, 22mm and 26mm backset variants



Cams

- Adjustable 7.7mm and 9mm mushroom cams

Material specification	Gearbox: Zinc alloy casting Faceplate: Mild steel and clear Triklad finish Keeps: Zinc alloy casting
Maintenance	As with most mechanical devices, locks require periodic maintenance. Every five years - Carry out the following checks: a. Check the tightness and security of all fixing screws. b. Check the gasket compression. Gasket compression can be adjusted via the cam and use of a 4mm hexagon key. It is recommended that the cam be adjusted as required to maintain the profile manufacturers recommended gasket compression.

Material specification	Gearbox: Zinc alloy casting Faceplate: Mild steel and clear Triklad finish Keeps: Zinc alloy casting
Maintenance	As with most mechanical devices, locks require periodic maintenance. Every five years - Carry out the following checks: a. Check the tightness and security of all fixing screws. b. Check the gasket compression. Gasket compression can be adjusted via the cam and use of a 4mm hexagon key. It is recommended that the cam be adjusted as required to maintain the profile manufacturers recommended gasket compression.