



THE YALE BRAND, with its unparalleled global reach and range of products, reassures more people in more countries than any other consumer locking solution.
© Yale, November 2020

Yale DWS
School Street, Willenhall, West Midlands WV13 3PW, UK
T: 01902 366800 F: 01902 369041
www.yaledws.co.uk

Technical Manual Door Hardware



All over the world, people are actively securing all they care about; their home, their family, their personal belongings or their business with the name they trust the most, Yale. That’s why we proudly say that Yale is **“the world’s favorite lock”**.

Yale protects millions of homes and businesses worldwide and is the brand behind locks of every design and function in over 125 countries. As one of the oldest international brands, Yale is among the best-known and most respected names in the lock industry.


Manufacturing strong and reliable locks for 180 years, Yale has bestowed the same high quality standards on the new Door Lock range that you have come to expect. The comprehensive range is tailored to suit both tailbar and euro profile options, as well as being versatile to fit both single and double door applications.



Contents

Multipoint Door Locks

Lockmaster 92 – 2 Hook (6’ 8”) Range	4
Lockmaster 92 – 3 Hook (8’) Range	6
Lockmaster 92 – 2 Tongue (6’ 8”) Range	8
Lockmaster 92 – 3 Tongue (8’) Range	10
Lockmaster 92 – Inactive (6’ 8” & 8’) Range	12
Lockmaster 92 – Active Shootbolt (6’ 8”) Range	14
Lockmaster 92 – Active Shootbolt (8’) Range	16
Lockmaster 92 – Single Point Range	18
Lockmaster 92 – 2 Hook 2 Roller (6’ 8”) Range	20
Lockmaster 90° Keyturn Roller Latch – 2 Hook (6’) Range	22
Lockmaster 28mm Range	24
Lockmaster AutoEngage (6’ 8” & 8’) Range	26
Adjustable Striker Range	28
Extension Range	30
Shootbolt and Striker Range	33

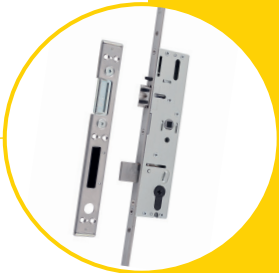

Door Hinges

Athena Door Hinge Range	34
-------------------------	----

Door Handles

Door Handle Range	35
Elite T Bar / Contemporary Handle Range	36



Door Cylinders

Cylinder Range	38
----------------	----

Smart Door Hardware

Conexis Smart Lock	40
--------------------	----





Lockmaster 92 – 2 Hook (6’ 8”) Range

Features

- Lockmaster signature hook offering high security locking
- 25.4mm (1”) SS304 Deadbolt Center with babysitter function as standard
- Easily reversible SS304 latch bolt to minimize stock requirements. Soft closing latch bolt to protect strikes
- 35mm, 45mm and 60mm backset options
- Sprung gearbox with PZ92mm center with elongated slot to accommodate trim set range
- 16mm and 20mm faceplate options available
- Optional Anti-Slam mishandling device; prevents multiple locking points from accidentally extending and potentially damaging door frame
- USA and Euro profile cylinder options available
- Brushed 304 Stainless Steel faceplate offering high corrosion resistance
- Yale branded

Specification


- BS EN 1670:2007 Grade 5
- Tested to a minimum of 100,000 cycles
- Made in Britain
- 10 year guarantee

Optional Extras


- SS304 Shootbolt Set for additional security
- SS304 Extension Piece to increase door lock height range
- Full range of adjustable SS304 strikes available
- Inactive Lock range available – see page 12



16mm Faceplate Part No.	20mm Faceplate Part No.	Description	Backset	Min Overall Length (Inc. Shootbolts)	Max Overall Length (Inc. Shootbolts)	Handle Height	Top Hook	Bottom Hook
YL92-310-35-104	YL92W-310-35-104	2 Hook, Brushed SS304	35mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")	788mm (31.02")	466mm (18.35")
YL92-310-45-104	YL92W-310-45-104	2 Hook, Brushed SS304	45mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")	788mm (31.02")	466mm (18.35")
YL92-310-60-104	YL92W-310-60-104	2 Hook, Brushed SS304	60mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")	788mm (31.02")	466mm (18.35")
YL92-310HD-35-104	YL92W-310HD-35-104	2 Hook, Hex Drive, Brushed SS304	35mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")	788mm (31.02")	466mm (18.35")
YL92-310HD-45-104	YL92W-310HD-45-104	2 Hook, Hex Drive, Brushed SS304	45mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")	788mm (31.02")	466mm (18.35")
YL92-310HD-60-104	YL92W-310HD-60-104	2 Hook, Hex Drive, Brushed SS304	60mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")	788mm (31.02")	466mm (18.35")
YL92-310ASHD-35-104	YL92W-310ASHD-35-104	2 Hook, Anti-Slam, Hex Drive, Brushed SS304	35mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")	788mm (31.02")	466mm (18.35")
YL92-310ASHD-45-104	YL92W-310ASHD-45-104	2 Hook, Anti-Slam, Hex Drive, Brushed SS304	45mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")	788mm (31.02")	466mm (18.35")
YL92-310ASHD-60-104	YL92W-310ASHD-60-104	2 Hook, Anti-Slam, Hex Drive, Brushed SS304	60mm	2006mm (78.98")	2155mm (84.89")	889mm (35.00")	788mm (31.02")	466mm (18.35")

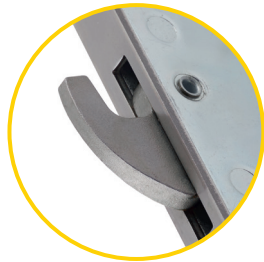

Technical Drawing

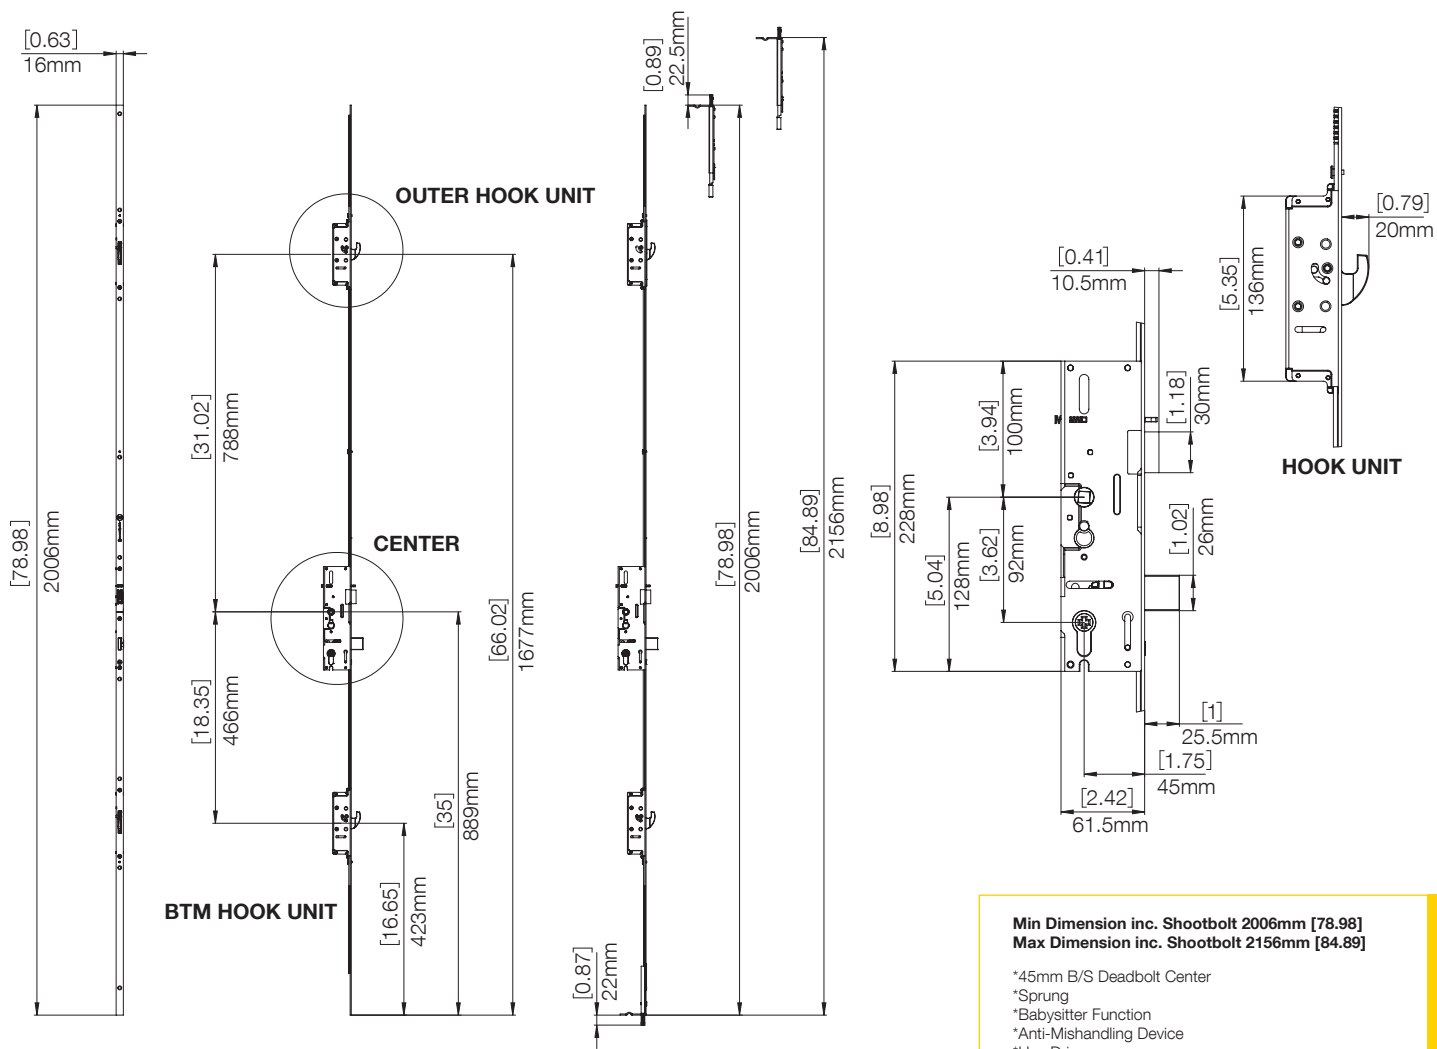

**Min Dimension inc. Shootbolt 2006mm [78.98]
Max Dimension inc. Shootbolt 2156mm [84.89]**

*45mm B/S Deadbolt Center
*Sprung
*Babysitter Function
*Anti-Mishandling Device
*Hex Drive

Note: 45mm backset, 16mm faceplate with anti-slam mishandling device and hex drive illustrated

Packaging Specification:

Locks
5 Locks per box
250 Locks per crate

Maintenance:

Yale recommends that all moving components are lubricated using a non-acidic mineral oil at least twice a year and surface cleaned with a damp cloth. The product may need to be adjusted to ensure satisfactory operation.

Material Specification:

Lock Case: Galvanized Steel
Faceplate: Brushed SS304
Connecting Rods: SS304
Dead/Sash Bolt: SS304
Hooks: SS304
Strikes: SS304





Lockmaster 92 – 3 Hook (8’) Range

Features

- Lockmaster signature hook offering high security locking
- 25.4mm (1”) SS304 Deadbolt center with babysitter function as standard
- Easily reversible SS304 latch bolt to minimize stock requirements. Soft closing latch bolt to protect strikes
- 35mm, 45mm and 60mm backset options
- Sprung gearbox with PZ92mm center with elongated slot to accommodate trim set range
- 16mm and 20mm faceplate options available
- Optional Anti-Slam mishandling device; prevents multiple locking points from accidentally extending and potentially damaging door frame
- USA and Euro profile cylinder options available
- Brushed 304 Stainless Steel faceplate offering high corrosion resistance
- Yale branded

Specification

- BS EN 1670:2007 Grade 5
- Tested to a minimum of 100,000 cycles
- Made in Britain
- 10 year guarantee


Optional Extras

- SS304 Shootbolt Set for additional security
- SS304 Extension Piece to increase door lock height range
- Full range of adjustable SS304 strikes available
- Inactive Lock range available – see page 12



16mm Faceplate Part No.	20mm Faceplate Part No.	Description	Backset	Min Overall Length (Inc. Shootbolts)	Max Overall Length (Inc. Shootbolts)	Handle Height	Outer Hook	Top Hook	Bottom Hook
YL92-312-35-104	YL92W-312-35-104	3 Hook, Brushed SS304	35mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")	1127mm (44.37")	788mm (31.02")	466mm (18.35")
YL92-312-45-104	YL92W-312-45-104	3 Hook, Brushed SS304	45mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")	1127mm (44.37")	788mm (31.02")	466mm (18.35")
YL92-312-60-104	YL92W-312-60-104	3 Hook, Brushed SS304	60mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")	1127mm (44.37")	788mm (31.02")	466mm (18.35")
YL92-312HD-35-104	YL92W-312HD-35-104	3 Hook, Hex Drive, Brushed SS304	35mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")	1127mm (44.37")	788mm (31.02")	466mm (18.35")
YL92-312HD-45-104	YL92W-312HD-45-104	3 Hook, Hex Drive, Brushed SS304	45mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")	1127mm (44.37")	788mm (31.02")	466mm (18.35")
YL92-312HD-60-104	YL92W-312HD-60-104	3 Hook, Hex Drive, Brushed SS304	60mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")	1127mm (44.37")	788mm (31.02")	466mm (18.35")
YL92-312ASHD-35-104	YL92W-312ASHD-35-104	3 Hook, Anti-Slam, Hex Drive, Brushed SS304	35mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")	1127mm (44.37")	788mm (31.02")	466mm (18.35")
YL92-312ASHD-45-104	YL92W-312ASHD-45-104	3 Hook, Anti-Slam, Hex Drive, Brushed SS304	45mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")	1127mm (44.37")	788mm (31.02")	466mm (18.35")
YL92-312ASHD-60-104	YL92W-312ASHD-60-104	3 Hook, Anti-Slam, Hex Drive, Brushed SS304	60mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")	1127mm (44.37")	788mm (31.02")	466mm (18.35")

Technical Drawing

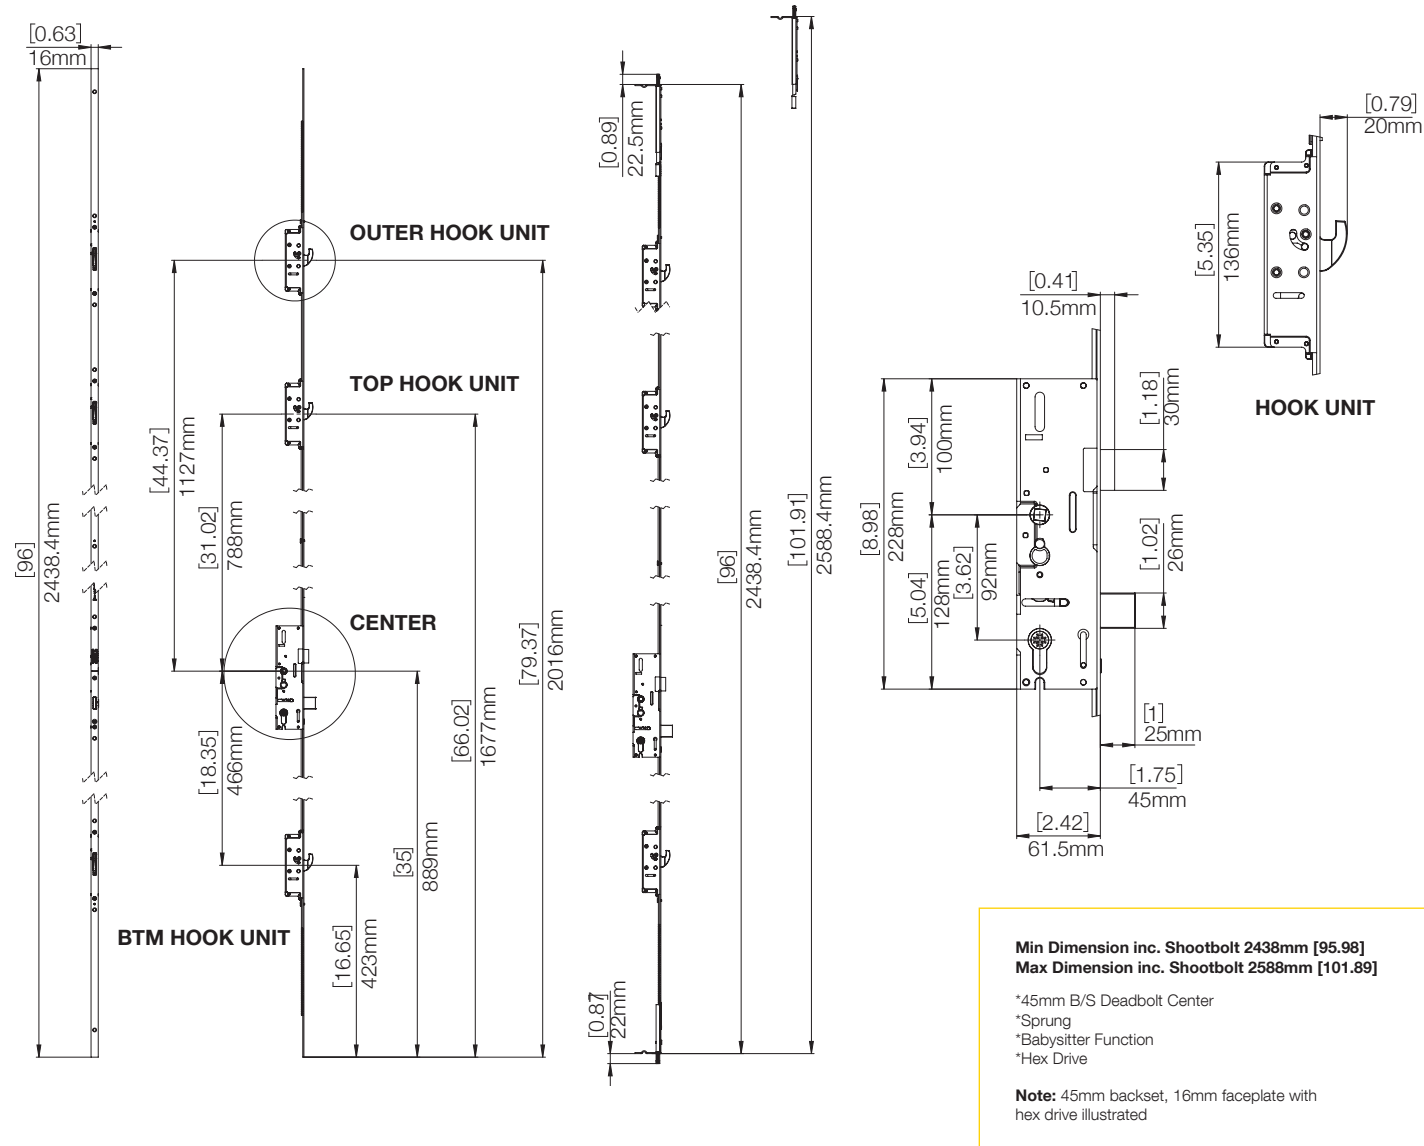

Packaging Specification:

Locks
5 Locks per box
250 Locks per crate

Maintenance:

Yale recommends that all moving components are lubricated using a non-acidic mineral oil at least twice a year and surface cleaned with a damp cloth. The product may need to be adjusted to ensure satisfactory operation.

Material Specification:

Lock Case: Galvanized Steel
Faceplate: Brushed SS304
Connecting Rods: SS304
Dead/Sash Bolt: SS304
Hooks: SS304
Strikes: SS304



Lockmaster 92 – 2 Tongue (6' 8") Range

Features

- Lockmaster tongue feature offering security with no sash prep requirement
- 25.4mm (1") SS304 Deadbolt Center with babysitter function as standard
- Easily reversible SS304 latch bolt to minimize stock requirements. Soft closing latch bolt to protect strikes
- 35mm, 45mm and 60mm backset options
- Sprung gearbox with PZ92mm center with elongated slot to accommodate trim set range
- 16mm and 20mm faceplate options available
- Optional Anti-Slam mishandling device; prevents multiple locking points from accidentally extending and potentially damaging door frame
- USA and Euro profile cylinder options available
- Brushed 304 Stainless Steel faceplate offering high corrosion resistance
- Yale branded

Specification

- BS EN 1670:2007 Grade 5
- Tested to a minimum of 100,000 cycles
- Made in Britain
- 10 year guarantee


Optional Extras

- SS304 Shootbolt Set for additional security
- SS304 Extension Piece to increase door lock height range
- Full range of adjustable SS304 strikes available
- Inactive Lock range available – see page 12



16mm Faceplate Part No.	20mm Faceplate Part No.	Description	Backset	Min Overall Length (Inc. Shootbolts)	Max Overall Length (Inc. Shootbolts)	Handle Height	Top Tongue	Bottom Tongue
YL92-316-35-104	YL92W-316-35-104	2 Tongue, Brushed SS304	35mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")	788mm (31.02")	466mm (18.35")
YL92-316-45-104	YL92W-316-45-104	2 Tongue, Brushed SS304	45mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")	788mm (31.02")	466mm (18.35")
YL92-316-60-104	YL92W-316-60-104	2 Tongue, Brushed SS304	60mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")	788mm (31.02")	466mm (18.35")
YL92-316HD-35-104	YL92W-316HD-35-104	2 Tongue, Hex Drive, Brushed SS304	35mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")	788mm (31.02")	466mm (18.35")
YL92-316HD-45-104	YL92W-316HD-45-104	2 Tongue, Hex Drive, Brushed SS304	45mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")	788mm (31.02")	466mm (18.35")
YL92-316HD-60-104	YL92W-316HD-60-104	2 Tongue, Hex Drive, Brushed SS304	60mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")	788mm (31.02")	466mm (18.35")
YL92-316ASHD-35-104	YL92W-316ASHD-35-104	2 Tongue, Anti-Slam, Hex Drive, Brushed SS304	35mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")	788mm (31.02")	466mm (18.35")
YL92-316ASHD-45-104	YL92W-316ASHD-45-104	2 Tongue, Anti-Slam, Hex Drive, Brushed SS304	45mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")	788mm (31.02")	466mm (18.35")
YL92-316ASHD-60-104	YL92W-316ASHD-60-104	2 Tongue, Anti-Slam, Hex Drive, Brushed SS304	60mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")	788mm (31.02")	466mm (18.35")

Technical Drawing

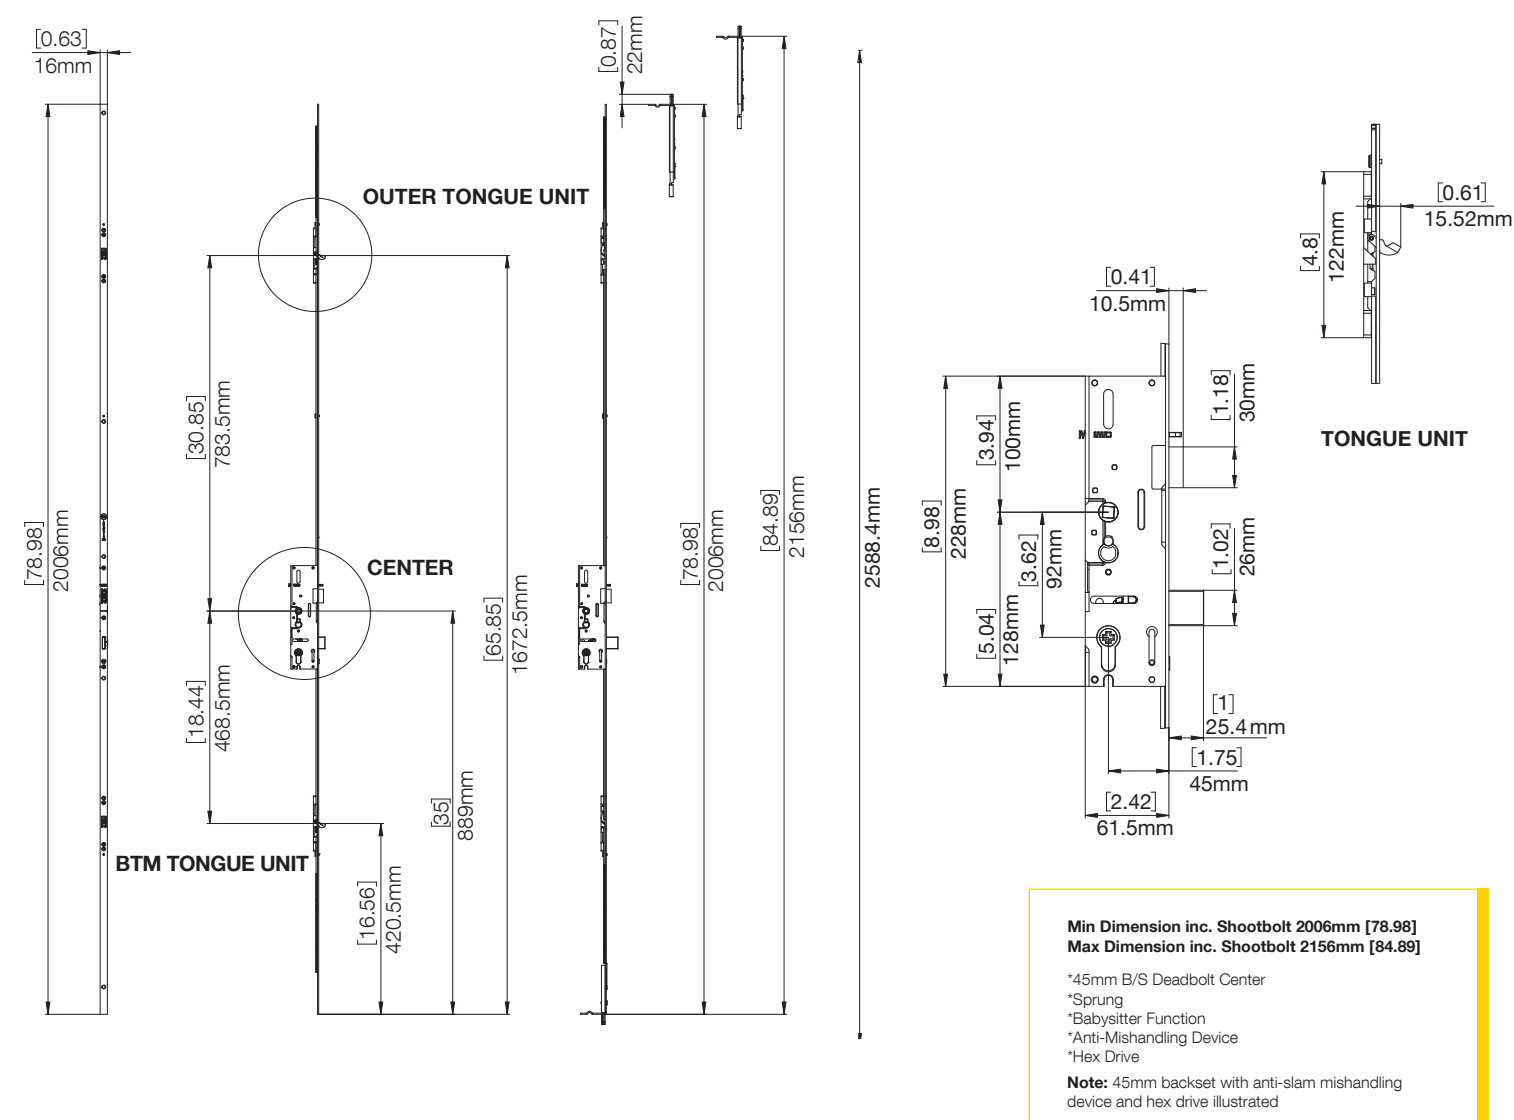

Packaging Specification:

Locks

5 Locks per box
250 Locks per crate

Material Specification:

Lock Case:	Galvanized Steel
Faceplate:	Brushed SS304
Connecting Rods:	SS304
Dead/Sash Bolt:	SS304
Hooks:	SS304
Strikes:	SS304

Maintenance:

Yale recommends that all moving components are lubricated using a non-acidic mineral oil at least twice a year and surface cleaned with a damp cloth. The product may need to be adjusted to ensure satisfactory operation.





Lockmaster 92 – 3 Tongue (8') Range

Features

- Lockmaster tongue feature offering security with no sash prep requirement
- 25.4mm (1") SS304 Deadbolt Center with babysitter function as standard
- Easily reversible SS304 latch bolt to minimize stock requirements. Soft closing latch bolt to protect strikes
- 35mm, 45mm and 60mm backset options
- Sprung gearbox with PZ92mm center with elongated slot to accommodate trim set range
- 16mm and 20mm faceplate options available
- Optional Anti-Slam mishandling device; prevents multiple locking points from accidentally extending and potentially damaging door frame
- USA and Euro profile cylinder options available
- Brushed 304 Stainless Steel faceplate offering high corrosion resistance
- Yale branded

Specification

- BS EN 1670:2007 Grade 5
- Tested to a minimum of 100,000 cycles
- Made in Britain
- 10 year guarantee

Optional Extras


- SS304 Shootbolt Set for additional security
- SS304 Extension Piece to increase door lock height range
- Full range of adjustable SS304 strikes available
- Inactive Lock range available – see page 12



16mm Faceplate Part No.	20mm Faceplate Part No.	Description	Backset	Min Overall Length (Inc. Shootbolts)	Max Overall Length (Inc. Shootbolts)	Handle Height	Outer Tongue	Top Tongue	Bottom Tongue
YL92-317-35-104	YL92W-317-35-104	3 Hook, Brushed SS304	35mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")	1127mm (44.37")	788mm (31.02")	466mm (18.35")
YL92-317-45-104	YL92W-317-45-104	3 Hook, Brushed SS304	45mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")	1127mm (44.37")	788mm (31.02")	466mm (18.35")
YL92-317-60-104	YL92W-317-60-104	3 Hook, Brushed SS304	60mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")	1127mm (44.37")	788mm (31.02")	466mm (18.35")
YL92-317HD-35-104	YL92W-317HD-35-104	3 Hook, Hex Drive, Brushed SS304	35mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")	1127mm (44.37")	788mm (31.02")	466mm (18.35")
YL92-317HD-45-104	YL92W-317HD-45-104	3 Hook, Hex Drive, Brushed SS304	45mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")	1127mm (44.37")	788mm (31.02")	466mm (18.35")
YL92-317HD-60-104	YL92W-317HD-60-104	3 Hook, Hex Drive, Brushed SS304	60mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")	1127mm (44.37")	788mm (31.02")	466mm (18.35")
YL92-317ASHD-35-104	YL92W-317ASHD-35-104	3 Hook, Anti-Slam, Hex Drive, Brushed SS304	35mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")	1127mm (44.37")	788mm (31.02")	466mm (18.35")
YL92-317ASHD-45-104	YL92W-317ASHD-45-104	3 Hook, Anti-Slam, Hex Drive, Brushed SS304	45mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")	1127mm (44.37")	788mm (31.02")	466mm (18.35")
YL92-317ASHD-60-104	YL92W-317ASHD-60-104	3 Hook, Anti-Slam, Hex Drive, Brushed SS304	60mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")	1127mm (44.37")	788mm (31.02")	466mm (18.35")



Technical Drawing

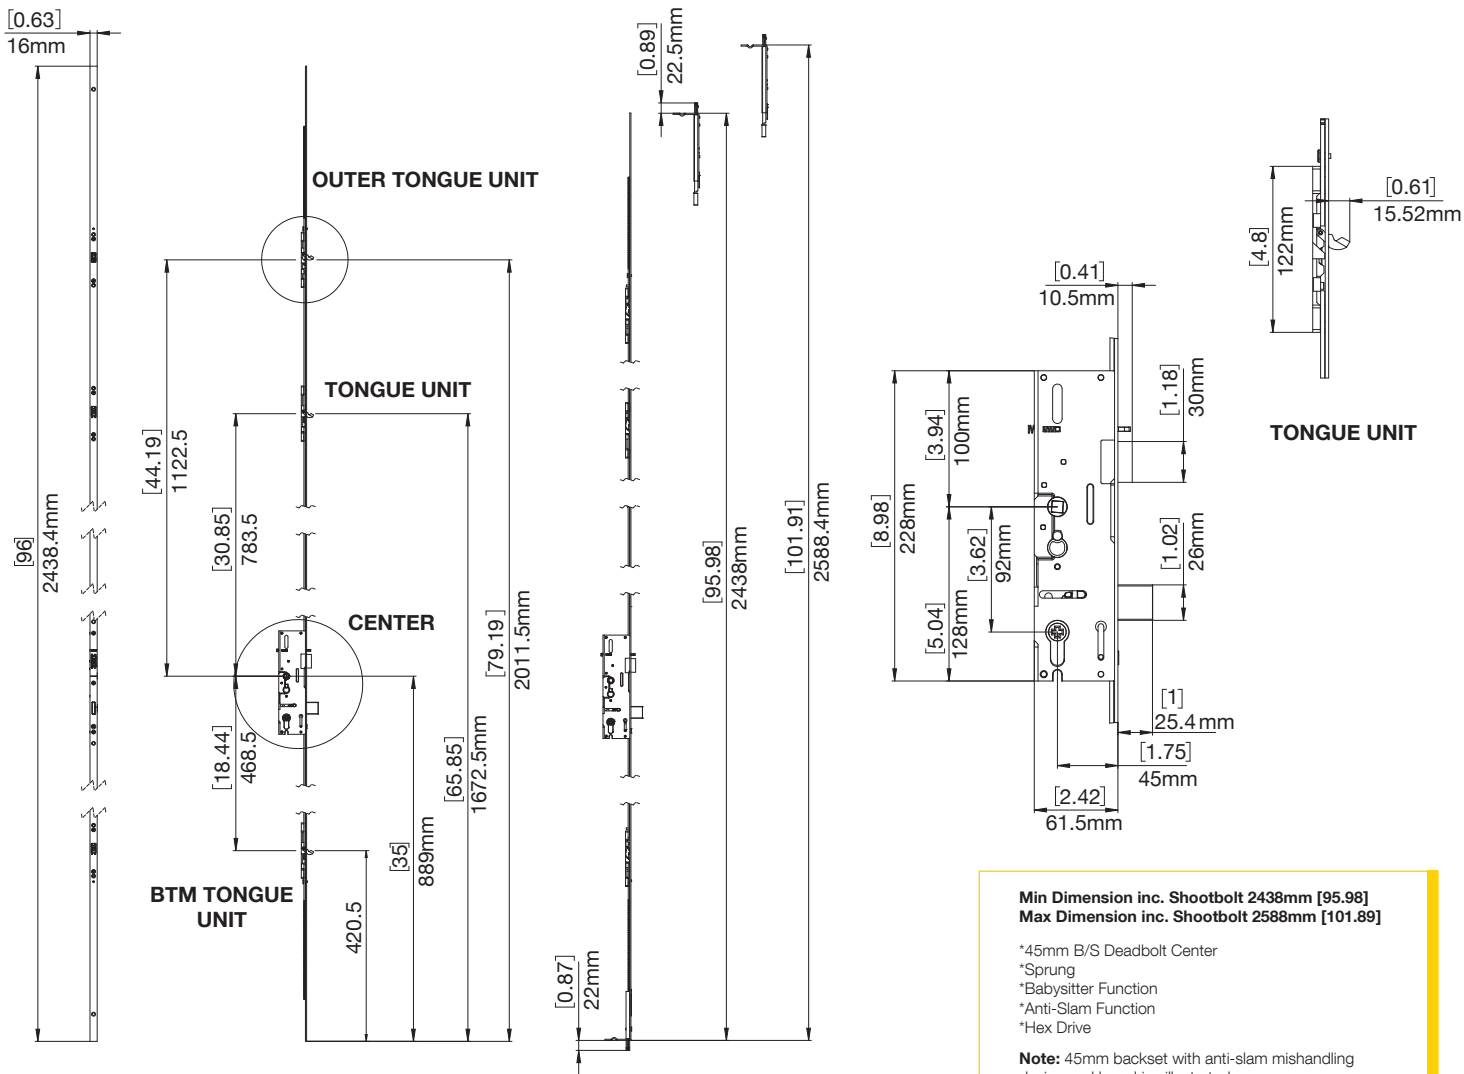

Packaging Specification:

Locks
5 Locks per box
250 Locks per crate

Maintenance:

Yale recommends that all moving components are lubricated using a non-acidic mineral oil at least twice a year and surface cleaned with a damp cloth. The product may need to be adjusted to ensure satisfactory operation.

Material Specification:

Lock Case: Galvanized Steel
Faceplate: Brushed SS304
Connecting Rods: SS304
Dead/Sash Bolt: SS304
Hooks: SS304
Strikes: SS304





Lockmaster 92 - Inactive (6' 8" & 8') Range

Features

- Inactive range of locks designed to accept a high security shootbolt set to secure the lock into frame
- 35mm, 45mm and 60mm backset options
- Sprung gearbox with PZ92mm center with elongated slot to accommodate trim set range
- 16mm and 20mm faceplate options available
- USA and Euro profile cylinder options available
- Brushed 304 Stainless Steel faceplate offering high corrosion resistance
- Yale branded

Specification

- BS EN 1670:2007 Grade 5
- Tested to a minimum of 100,000 cycles
- Made in Britain
- 10 year guarantee


Optional Extras

- SS304 Shootbolt Set for additional security
- SS304 Extension Piece to increase door lock height range
- Full range of adjustable SS304 strikes available



16mm Faceplate Part No.	20mm Faceplate Part No.	Description	Backset	Min Overall Length (Inc. Shootbolts)	Max Overall Length (Inc. Shootbolts)	Handle Height
YL92-311-35-104	YL92W-311-35-104	Inactive 6'8", SS304	35mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")
YL92-311-45-104	YL92W-311-45-104	Inactive 6'8", Brushed SS304	45mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")
YL92-311-60-104	YL92W-311-60-104	Inactive 6'8", Brushed SS304	60mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")
YL92-311HD-35-104	YL92W-311HD-35-104	Inactive 6'8", Hex Drive, SS304	35mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")
YL92-311HD-45-104	YL92W-311HD-45-104	Inactive 6'8", Hex Drive, Brushed SS304	45mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")
YL92-311HD-60-104	YL92W-311HD-60-104	Inactive 6'8", Hex Drive, Brushed SS304	60mm	2006mm (78.98")	2156mm (84.89")	889mm (35.00")
YL92-313-35-104	YL92W-313-35-104	Inactive 8', Brushed SS304	35mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")
YL92-313-45-104	YL92W-313-45-104	Inactive 8', Brushed SS304	45mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")
YL92-313-60-104	YL92W-313-60-104	Inactive 8', Brushed SS304	60mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")
YL92-313HD-35-104	YL92W-313HD-35-104	Inactive 8', Hex Drive, SS304	35mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")
YL92-313HD-45-104	YL92W-313HD-45-104	Inactive 8', Hex Drive, Brushed SS304	45mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")
YL92-313HD-60-104	YL92W-313HD-60-104	Inactive 8', Hex Drive, Brushed SS304	60mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")

Technical Drawing

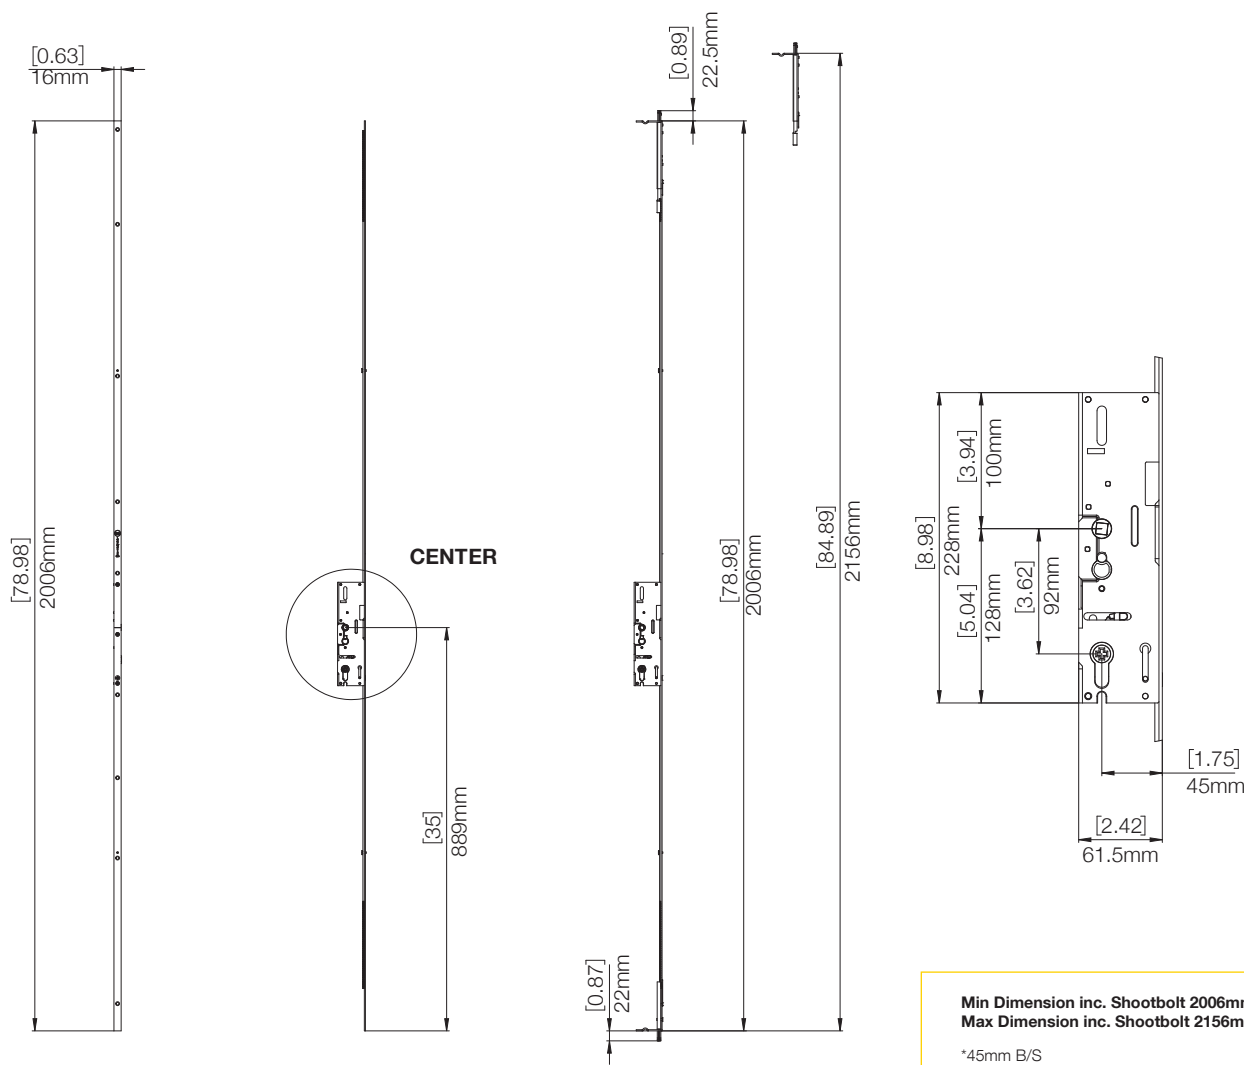

Min Dimension inc. Shootbolt 2006mm [78.98]
Max Dimension inc. Shootbolt 2156mm [84.89]

*45mm B/S
*Sprung
*Hex Drive

Note: 45mm backset with hex drive,
6ft 8" lock illustrated

Packaging Specification:

Locks
5 Locks per box
250 Locks per crate

Maintenance:

Yale recommends that all moving components are lubricated using a non-acidic mineral oil at least twice a year and surface cleaned with a damp cloth. The product may need to be adjusted to ensure satisfactory operation.

Material Specification:

Lock Case: Galvanized Steel
Faceplate: SS304 / Brushed SS304
Connecting Rods: SS304 / Galvanized
Strikes: SS304





Lockmaster 92 – Active Shootbolt (6’ 8”) Range

Features

- Active range of locks designed to accept a high security shootbolt set to secure the lock into frame
- 25.4mm (1”) SS304 Deadbolt Center with babysitter function as standard
- Easily reversible SS304 latch bolt to minimize stock requirements. Soft closing latch bolt to protect strikes
- 35mm, 45mm and 60mm backset options
- Sprung gearbox with PZ92mm center with elongated slot to accommodate trim set range
- 16mm and 20mm faceplate options available
- Optional Anti-Slam mishandling device; prevents multiple locking points from accidentally extending and potentially damaging door frame
- USA and Euro profile cylinder options available
- Brushed 304 Stainless Steel faceplate offering high corrosion resistance
- Yale branded



Specification

- BS EN 1670:2007 Grade 5
- Tested to a minimum of 100,000 cycles
- Made in Britain
- 10 year guarantee


Optional Extras

- SS304 Shootbolt Set for additional security
- SS304 Extension Piece to increase door lock height range
- Full range of adjustable SS304 strikes available
- Inactive Lock range available - see page 12



16mm Faceplate Part No.	20mm Faceplate Part No.	Description (Shootbolt sold separately)	Backset	Min Overall Length (Inc. Shootbolts)	Max Overall Length (Inc. Shootbolts)	Handle Height
YL92-314-35-104	YL92W-314-35-104	Active 6’8”, Shootbolt, Brushed SS304	35mm	2006mm (78.98”)	2156mm (84.89”)	889mm (35.00”)
YL92-314-45-104	YL92W-314-45-104	Active 6’8”, Shootbolt, Brushed SS304	45mm	2006mm (78.98”)	2156mm (84.89”)	889mm (35.00”)
YL92-314-60-104	YL92W-314-60-104	Active 6’8”, Shootbolt, Brushed SS304	60mm	2006mm (78.98”)	2156mm (84.89”)	889mm (35.00”)
YL92-314HD-35-104	YL92W-314HD-35-104	Active 6’8”, Shootbolt, Hex Drive, Brushed SS304	35mm	2006mm (78.98”)	2156mm (84.89”)	889mm (35.00”)
YL92-314HD-45-104	YL92W-314HD-45-104	Active 6’8”, Shootbolt, Hex Drive, Brushed SS304	45mm	2006mm (78.98”)	2156mm (84.89”)	889mm (35.00”)
YL92-314HD-60-104	YL92W-314HD-60-104	Active 6’8”, Shootbolt, Hex Drive, Brushed SS304	60mm	2006mm (78.98”)	2156mm (84.89”)	889mm (35.00”)
YL92-314ASHD-35-104	YL92W-314ASHD-35-104	Active 6’8”, Shootbolt, Anti-Slam, Hex Drive, Brushed SS304	35mm	2006mm (78.98”)	2156mm (84.89”)	889mm (35.00”)
YL92-314ASHD-45-104	YL92W-314ASHD-45-104	Active 6’8”, Shootbolt, Anti-Slam, Hex Drive, Brushed SS304	45mm	2006mm (78.98”)	2156mm (84.89”)	889mm (35.00”)
YL92-314ASHD-60-104	YL92W-314ASHD-60-104	Active 6’8”, Shootbolt, Anti-Slam, Hex Drive, Brushed SS304	60mm	2006mm (78.98”)	2156mm (84.89”)	889mm (35.00”)

Technical Drawing

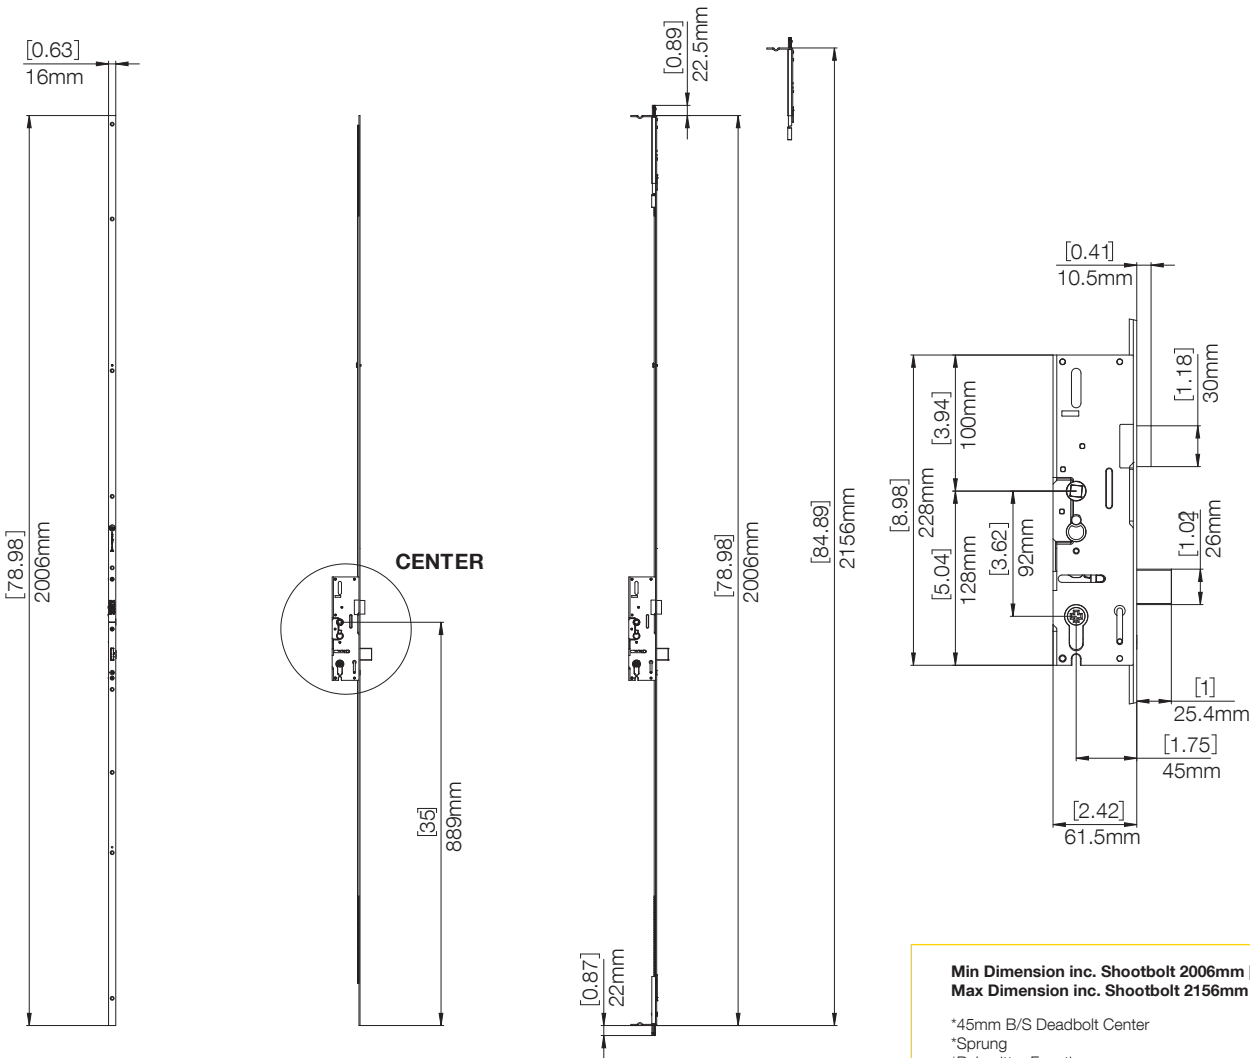

Min Dimension inc. Shootbolt 2006mm [78.98]
Max Dimension inc. Shootbolt 2156mm [84.89]

*45mm B/S Deadbolt Center
*Sprung
*Babysitter Function
*Hex Drive

Note: 45mm backset, 16mm faceplate with anti-slam mishandling device and hex drive illustrated

Packaging Specification:

Locks
5 Locks per box
250 Locks per crate

Maintenance:

Yale recommends that all moving components are lubricated using a non-acidic mineral oil at least twice a year and surface cleaned with a damp cloth. The product may need to be adjusted to ensure satisfactory operation.

Material Specification:

Lock Case: Galvanized Steel
Faceplate: Brushed SS304
Connecting Rods: SS304
Dead/Sash Bolt: SS304
Strikes: SS304





Lockmaster 92 – Active Shootbolt (8’) Range

Features

- Active range of locks designed to accept a high security shootbolt set to secure the lock into frame
- 25.4mm (1”) SS304 Deadbolt Center with babysitter function as standard
- Easily reversible SS304 latch bolt to minimize stock requirements. Soft closing latch bolt to protect strikes
- 35mm, 45mm and 60mm backset options
- Sprung gearbox with PZ92mm center with elongated slot to accommodate trim set range
- 16mm and 20mm faceplate options available
- Optional Anti-Slam mishandling device; prevents multiple locking points from accidentally extending and potentially damaging door frame
- USA and Euro profile cylinder options available
- Brushed 304 Stainless Steel faceplate offering high corrosion resistance
- Yale branded



Specification

- BS EN 1670:2007 Grade 5
- Tested to a minimum of 100,000 cycles
- Made in Britain
- 10 year guarantee


Optional Extras

- SS304 Shootbolt Set for additional security
- SS304 Extension Piece to increase door lock height range
- Full range of adjustable SS304 strikes available
- Inactive Lock range available - see page 12



16mm Faceplate Part No.	20mm Faceplate Part No.	Description (Shootbolt sold separately)	Backset	Min Overall Length (Inc. Shootbolts)	Max Overall Length (Inc. Shootbolts)	Handle Height
YL92-315-35-104	YL92W-315-35-104	Active 8', Shootbolt, Brushed SS304	35mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")
YL92-315-45-104	YL92W-315-45-104	Active 8', Shootbolt, Brushed SS304	45mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")
YL92-315-60-104	YL92W-315-60-104	Active 8', Shootbolt, Brushed SS304	60mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")
YL92-315HD-35-104	YL92W-315HD-35-104	Active 8', Shootbolt, Hex Drive, Brushed SS304	35mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")
YL92-315HD-45-104	YL92W-315HD-45-104	Active 8', Shootbolt, Hex Drive, Brushed SS304	45mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")
YL92-315HD-60-104	YL92W-315HD-60-104	Active 8', Shootbolt, Hex Drive, Brushed SS304	60mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")
YL92-315ASHD-35-104	YL92W-315ASHD-35-104	Active 8', Shootbolt, Anti-Slam, Hex Drive, Brushed SS304	35mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")
YL92-315ASHD-45-104	YL92W-315ASHD-45-104	Active 8', Shootbolt, Anti-Slam, Hex Drive, Brushed SS304	45mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")
YL92-315ASHD-60-104	YL92W-315ASHD-60-104	Active 8', Shootbolt, Anti-Slam, Hex Drive, Brushed SS304	60mm	2438mm (95.98")	2588mm (101.89")	889mm (35.00")

Technical Drawing

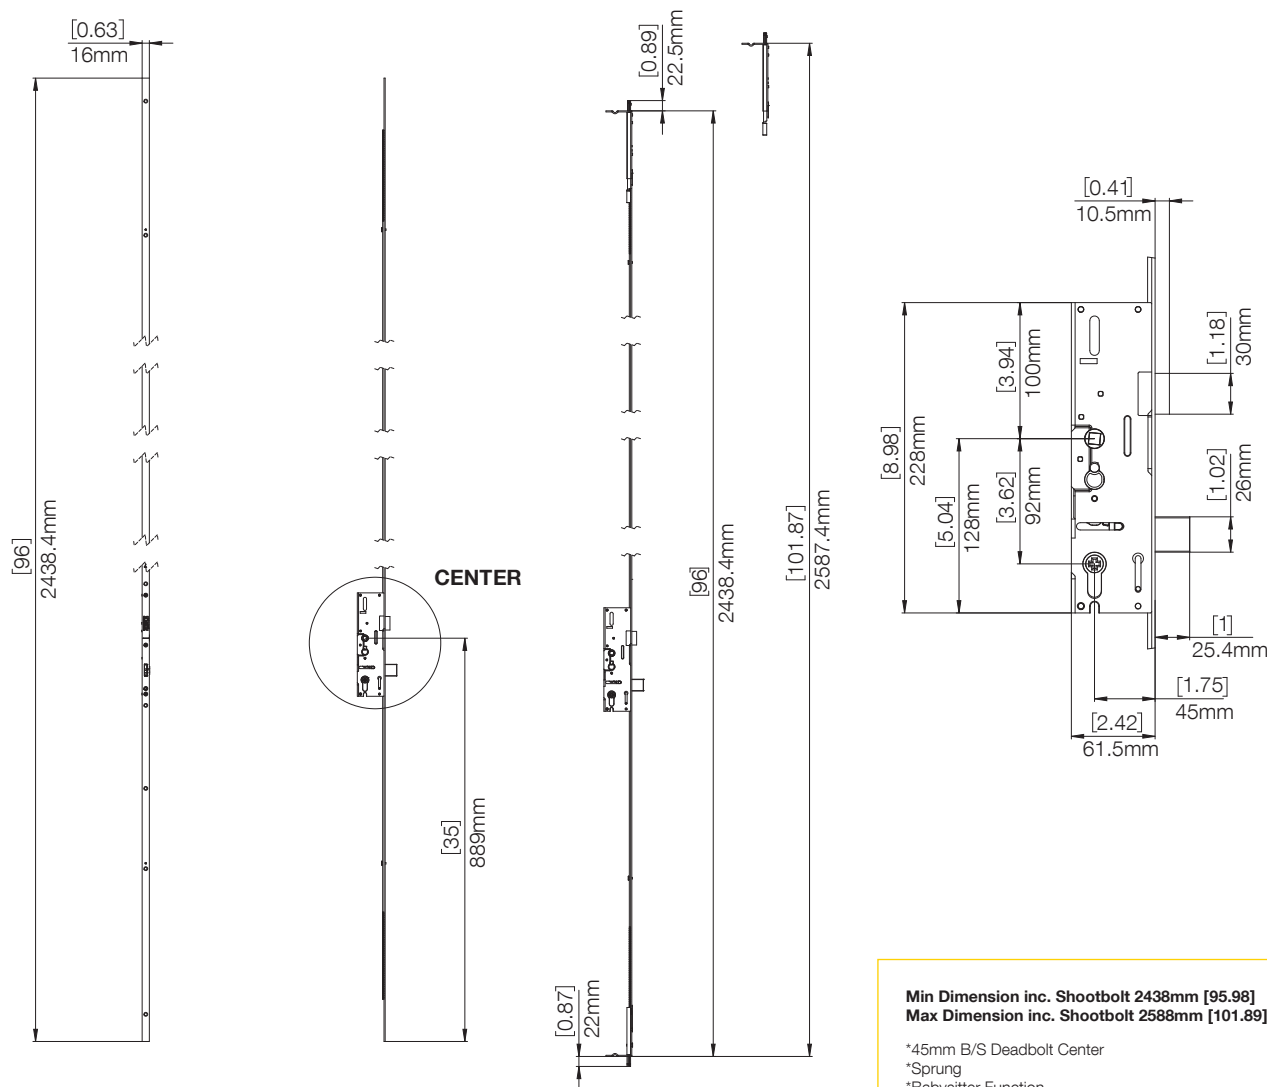

Min Dimension inc. Shootbolt 2438mm [95.98]
Max Dimension inc. Shootbolt 2588mm [101.89]
*45mm B/S Deadbolt Center
*Sprung
*Babysitter Function
*Hex Drive
Note: 45mm backset, 16mm faceplate with hex drive illustrated

Packaging Specification:

Locks
5 Locks per box
250 Locks per crate

Maintenance:

Yale recommends that all moving components are lubricated using a non-acidic mineral oil at least twice a year and surface cleaned with a damp cloth. The product may need to be adjusted to ensure satisfactory operation.

Material Specification:

Lock Case: Galvanized Steel
Faceplate: Brushed SS304
Connecting Rods: SS304
Dead/Sash Bolt: SS304
Strikes: SS304



Lockmaster 92 – Single Point Range

Features

- 25.4mm (1") SS304 Deadbolt Center with babysitter function as standard
- Easily reversible SS304 latch bolt to minimize stock requirements. Soft closing latch bolt to protect strikes
- 35mm, 45mm and 60mm backset options
- Sprung gearbox with PZ92mm center with elongated slot to accommodate trim set range
- 16mm and 20mm faceplate options available
- Square and round ended faceplate options available
- USA and Euro profile cylinder options available
- Brushed 304 Stainless Steel faceplate offering high corrosion resistance
- Yale branded

Specification

- BS EN 1670:2007 Grade 5
- Tested to a minimum of 100,000 cycles
- Made in Britain
- 10 year guarantee


Optional Extras

- Full range of adjustable SS304 strikes available



16mm Faceplate Part No.	20mm Faceplate Part No.	Description	Backset
YL92-319-35-104	YL92W-319-35-104	Single Point, Brushed SS304	35mm
YL92-319-45-104	YL92W-319-45-104	Single Point, Brushed SS304	45mm
YL92-319-60-104	YL92W-319-60-104	Single Point, Brushed SS304	60mm
YL92-319HD-35-104	YL92W-319HD-35-104	Single Point, Hex Drive, Brushed SS304	35mm
YL92-319HD-45-104	YL92W-319HD-45-104	Single Point, Hex Drive, Brushed SS304	45mm
YL92-319HD-60-104	YL92W-319HD-60-104	Single Point, Hex Drive, Brushed SS304	60mm

Technical Drawing

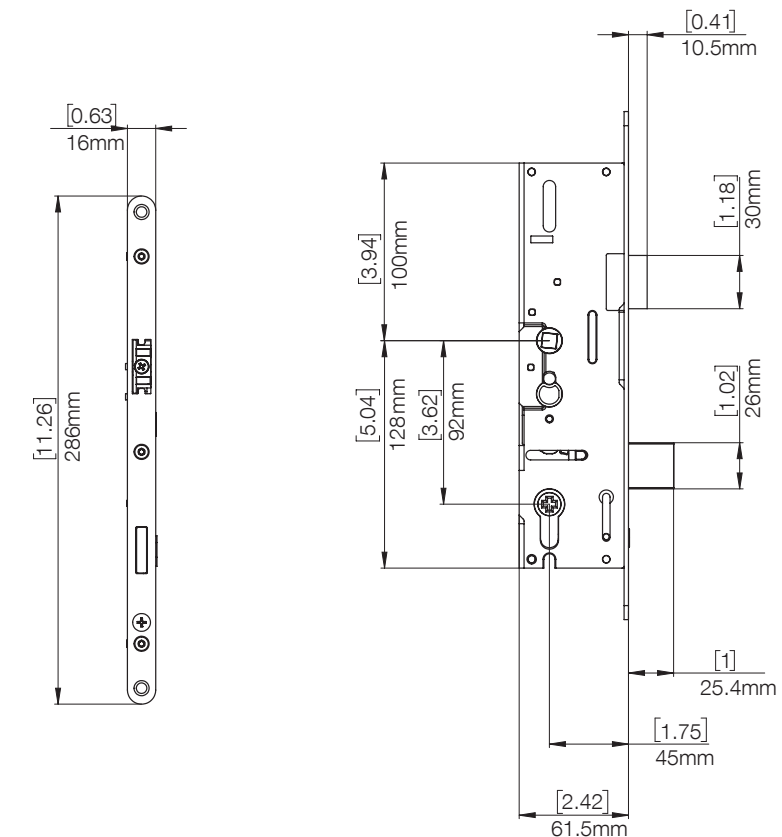

- *45mm B/S Deadbolt Center
- *Sprung
- *Babysitter Function
- *Hex Drive

Note: 45mm backset, 16mm faceplate with hex drive illustrated

Packaging Specification:

Locks


5 Locks per box
250 Locks per crate

Material Specification:

Lock Case:	Galvanized Steel
Faceplate:	Brushed SS304
Dead/Sash Bolt:	SS304
Strikes:	SS304

Maintenance:

Yale recommends that all moving components are lubricated using a non-acidic mineral oil at least twice a year and surface cleaned with a damp cloth. The product may need to be adjusted to ensure satisfactory operation.

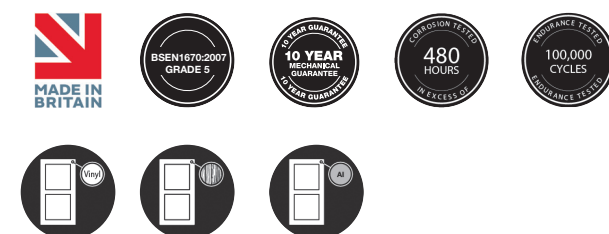



Lockmaster 92 – 2 Hook 2 Roller (6’ 8”) Range

Features


- Lockmaster signature hook offering high security locking with twin precision adjustable rollers for enhanced performance and weather sealing
- 25.4mm (1”) SS304 Deadbolt Center with babysitter function as standard
- Easily reversible SS304 latch bolt to minimize stock requirements. Soft closing latch bolt to protect strikes
- 35mm, 45mm backset options
- Sprung gearbox with PZ92mm center with elongated slot to accommodate trim set range
- Optional Anti-Slam mishandling device; prevents multiple locking points from accidentally extending and potentially damaging door frame
- USA and Euro profile cylinder options available
- Brushed 304 Stainless Steel faceplate offering high corrosion resistance
- Yale branded

Specification

- BS EN 1670:2007 Grade 5
- Tested to a minimum of 100,000 cycles
- Made in Britain
- 10 year guarantee


Optional Extras

- SS304 Shootbolt Set for additional security
- SS304 Extension Piece to increase door lock height range
- Full range of adjustable SS304 strikes available
- Inactive Lock range available – see page 12



Part No.	Description	Backset	Min Overall Length (Inc. Shootbolts)	Max Overall Length (Inc. Shootbolts)	Handle Height	Top Hook	Bottom Hook
YL92-344-35-104	2 Hook 2 Roller, 16mm faceplate, Brushed SS304	35mm	2000mm (78.74")	2150mm (84.65")	999mm (39.36")	504mm (19.84")	532mm (20.94")
YL92-344-45-104	2 Hook 2 Roller, 16mm faceplate, Brushed SS304	45mm	2000mm (78.74")	2150mm (84.65")	999mm (39.36")	504mm (19.84")	532mm (20.94")
YL92-344HD-35-104	2 Hook 2 Roller, Hex Drive Adaptor, 16mm faceplate, Brushed SS304	35mm	2000mm (78.74")	2150mm (84.65")	999mm (39.36")	504mm (19.84")	532mm (20.94")
YL92-344HD-45-104	2 Hook 2 Roller, Hex Drive Adaptor, 16mm faceplate, Brushed SS304	45mm	2000mm (78.74")	2150mm (84.65")	999mm (39.36")	504mm (19.84")	532mm (20.94")
YL92-344ASHD-35-104	2 Hook 2 Roller, Anti-Slam, Hex Drive Adaptor, 16mm faceplate, Brushed SS304	35mm	2000mm (78.74")	2150mm (84.65")	999mm (39.36")	504mm (19.84")	532mm (20.94")
YL92-344ASHD-45-104	2 Hook 2 Roller, Anti-Slam, Hex Drive Adaptor, 16mm faceplate, Brushed SS304	45mm	2000mm (78.74")	2150mm (84.65")	999mm (39.36")	504mm (19.84")	532mm (20.94")

Technical Drawing

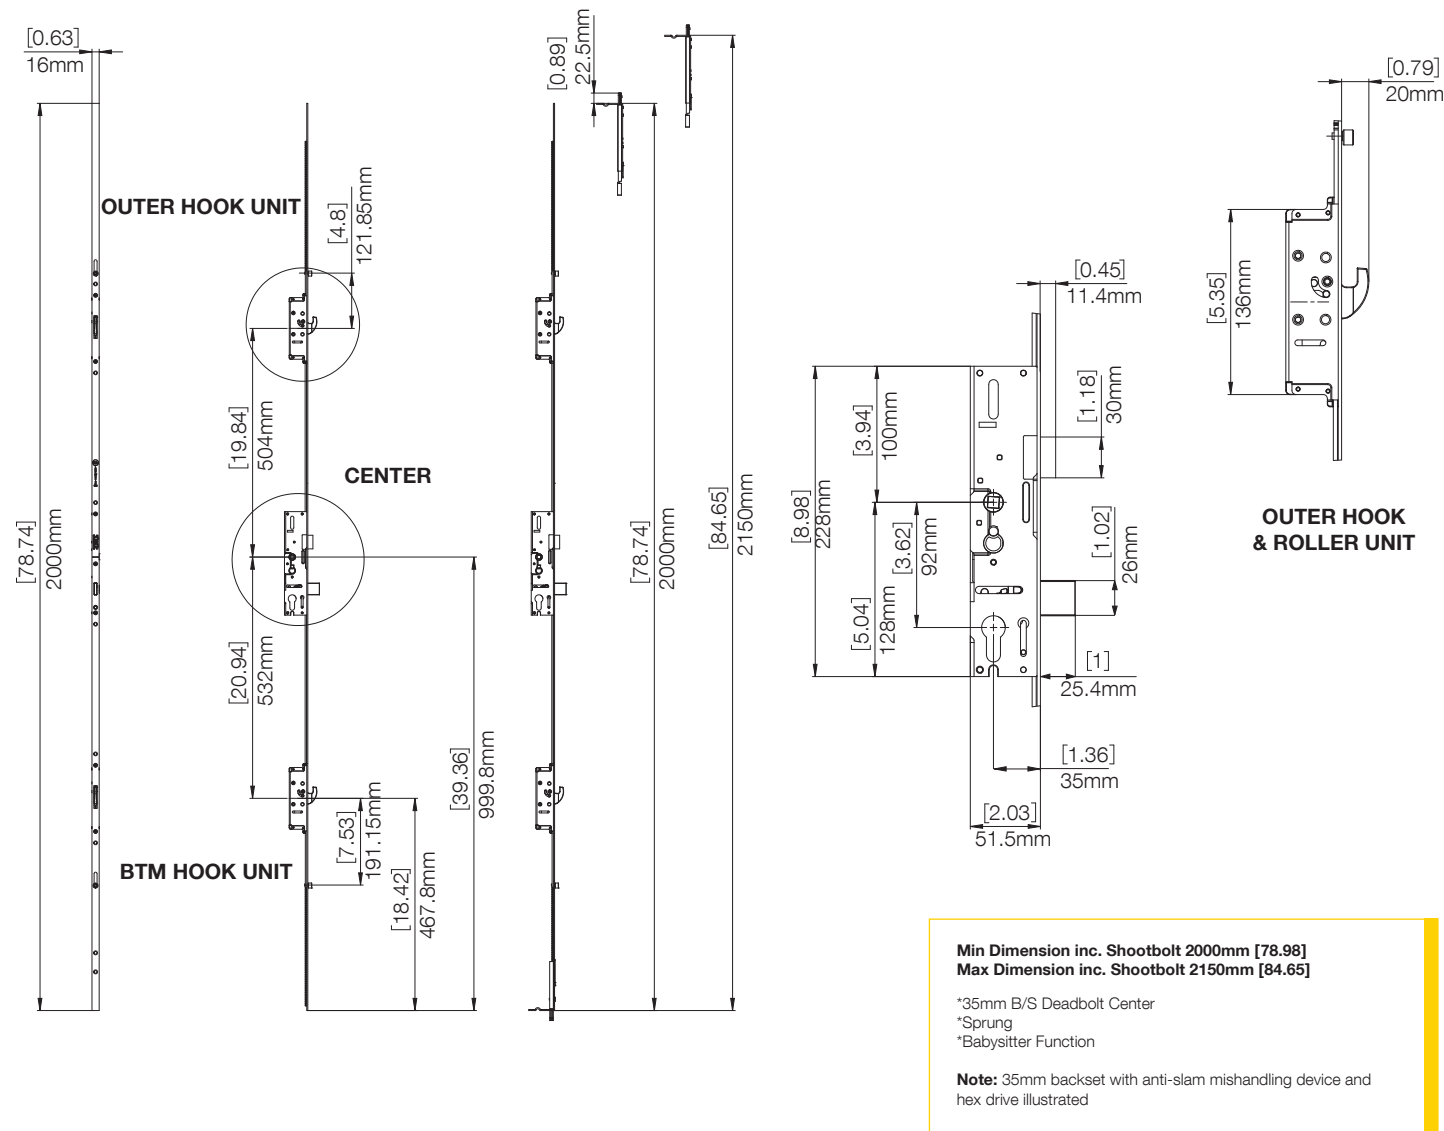

Packaging Specification:

Locks
5 Locks per box
250 Locks per crate

Maintenance:

Yale recommends that all moving components are lubricated using a non-acidic mineral oil at least twice a year and surface cleaned with a damp cloth. The product may need to be adjusted to ensure satisfactory operation.

Material Specification:

Lock Case: Galvanized Steel
Faceplate: Brushed SS304
Connecting Rods: SS304
Dead/Sash Bolt: SS304
Hooks: SS304
Rollers: SS304
Strikes: SS304



Lockmaster 90° Keyturn Roller Latch – 2 Hook (6') Range

Features



- 90° Keyturn operated locking device with adjustable roller latch
- Lockmaster signature hook offering high security locking
- Deadbolt Center with babysitter function as standard
- 35mm, 45mm and 55mm backset options
- Sprung gearbox with elongated slot to accommodate trim set range
- 304 Stainless Steel 24mm U-Channel and 20mm faceplate options offering high corrosion resistance
- Designed to be compatible with a wide range of decorative furniture sets, including a full range of SS316 Bar handles and cylinder escutcheons
- Yale branded

Specification

- BS EN 1670:2007 Grade 5
- Tested to a minimum of 100,000 cycles
- Made in Britain
- 10 year guarantee

Optional Extras

- SS304 Extension Piece to increase door lock height range
- Full range of adjustable SS304 strikes available
- Full range of SS316 Bar handles and cylinder escutcheons



Part No.	Description	Backset	Min Overall Length	Max Overall Length (Inc. Extension)	Handle Height	Top Hook	Bottom Hook
YKTR-35D-001-60	90° Keyturn, 2 Hook, 24mm U-Channel faceplate, SS304	35mm	1829mm (72.00")	2404mm (94.65")	1035mm (40.71")	440mm (17.32")	627mm (24.67")
YKTR-45D-001-60	90° Keyturn, 2 Hook, 24mm U-Channel faceplate, SS304	45mm	1829mm (72.00")	2404mm (94.65")	1035mm (40.71")	440mm (17.32")	627mm (24.67")
YKTR-55D-001-60	90° Keyturn, 2 Hook, 24mm U-Channel faceplate, SS304	55mm	1829mm (72.00")	2404mm (94.65")	1035mm (40.71")	440mm (17.32")	627mm (24.67")
YKTR-35D-003-60	90° Keyturn, 2 Hook, 20mm faceplate, SS304	35mm	1930mm (76.00")	2200mm (86.61")	1035mm (40.71")	744mm (29.29")	627mm (24.67")
YKTR-45D-003-60	90° Keyturn, 2 Hook, 20mm faceplate, SS304	45mm	1930mm (76.00")	2200mm (86.61")	1035mm (40.71")	744mm (29.29")	627mm (24.67")
YKTR-55D-003-60	90° Keyturn, 2 Hook, 20mm faceplate, SS304	55mm	1930mm (76.00")	2200mm (86.61")	1035mm (40.71")	744mm (29.29")	627mm (24.67")


Strikes

Part No.	Description
YIK13-CA-01L-60	Adjustable Center Strike, Left Hand, SS304
YIK13-CA-02R-60	Adjustable Center Strike, Right Hand, SS304
YIK13-CA-05-60	Adjustable Hook Strike, SS304

Accessories

Part No.	Description
SPLU2479HK-60	24mm U-Channel Lock Extension with Hook, SS304
SPLU2479-60	24mm U-Channel Lock Extension, SS304
YL92U-CLIP-60	24mm U-Channel Joining Clip, SS304
SPL2481HK-104	20mm Lock Extension with Hook, Brushed SS304
SPLSB36-60	20mm Bottom Shootbolt, SS304
SPLSB37-60	20mm Top Shootbolt, SS304

Technical Drawing

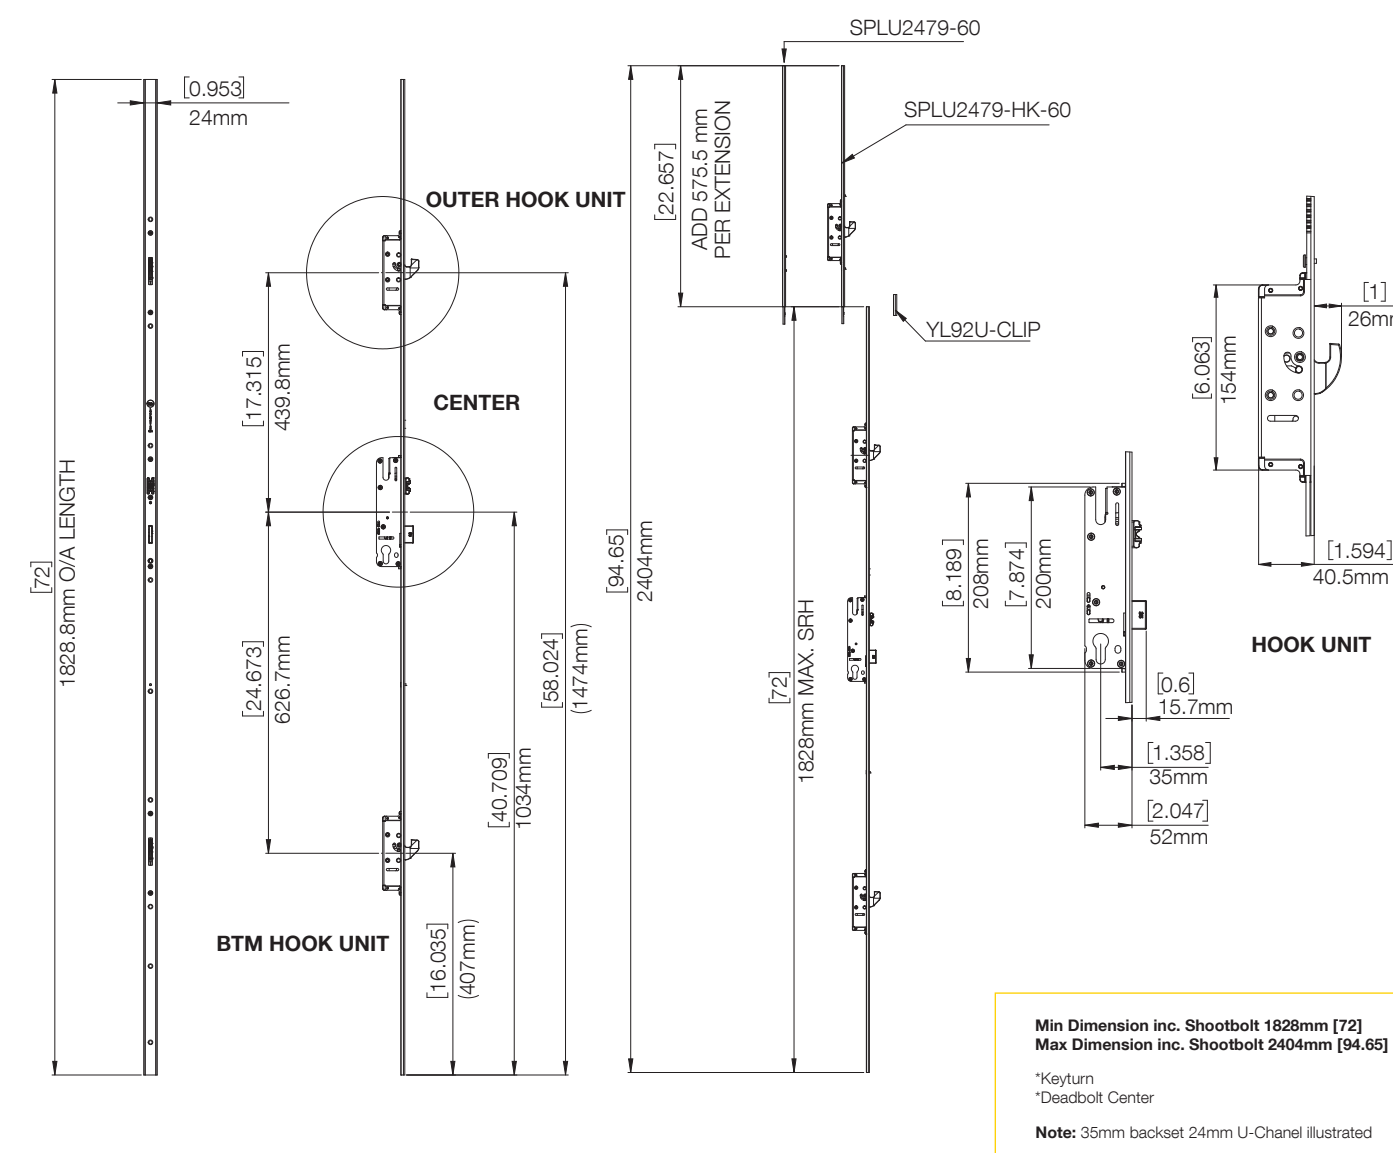

Packaging Specification:

Locks

5 Locks per box
250 Locks per crate

Material Specification:

Lock Case:	Galvanized Steel
Faceplate:	SS304
Connecting Rods:	Galvanized Steel
Dead/Sash Bolt:	Zinc Alloy
Hooks:	Zinc Alloy
Rollers:	SS304
Strikes:	SS304

Maintenance

Yale recommends that all moving components are lubricated using a non-acidic mineral oil at least twice a year and surface cleaned with a damp cloth. The product may need to be adjusted to ensure satisfactory operation.





Lockmaster 28mm Range

Features


- Lockmaster signature hook offering high security locking
- Option encompassing twin precision adjustable rollers for enhanced performance and weather sealing also available
- Deadbolt Center
- 28mm backset
- Sprung gearbox with PZ92mm center with elongated slot to accommodate trim set range
- 16mm and 24mm 304 Stainless Steel options offering high corrosion resistance
- Yale branded

Specification

- BS EN 1670:2007 Grade 5
- Tested to a minimum of 100,000 cycles
- Made in Britain
- 10 year guarantee

Optional Extras

- SS304 Shootbolt Set for additional security
- SS304 Extension Piece to increase door lock height range
- Full range of adjustable SS304 strikes available
- Full range of SS304 28mm slim handles available



Part No.	Description	Backset	Min Overall Length	Max Overall Length (Inc. extension)	Handle Height	Top Hook	Bottom Hook
YLBF006-28D-60	2 Hook 2 Roller, 16mm faceplate, SS304	28mm	1869mm (73.58")	2227mm (87.68")	1050mm (41.34")	584mm (22.99")	642mm (25.28")
YLBF007-28D-60	2 Hook, 24mm U-Channel faceplate, SS304	28mm	1869mm (73.58")	2227mm (87.68")	1050mm (41.34")	584mm (22.99")	642mm (25.28")


Strikes

Part No.	Description
YIK13-CA-01L-60	Adjustable Center Strike, Left Hand, SS304
YIK13-CA-02R-60	Adjustable Center Strike, Right Hand, SS304
YIK13-CA-05-60	Adjustable Hook Strike, SS304
PLK933-19	3 Piece Strike set, Left Hand, GS
PLK934-19	3 Piece Strike set, Right Hand, GS
LK037	One Piece Keep, Left Hand, GS
LK038	One Piece Keep, Right Hand, GS

Accessories

Part No.	Description
SPLU2479HK-60	24mm U-Channel Lock Extension with Hook, SS304
SPLU2479-60	24mm U-Channel Lock Extension, SS304
YL92U-CLIP-60	24mm U-Channel Joining Clip, SS304

Technical Drawing

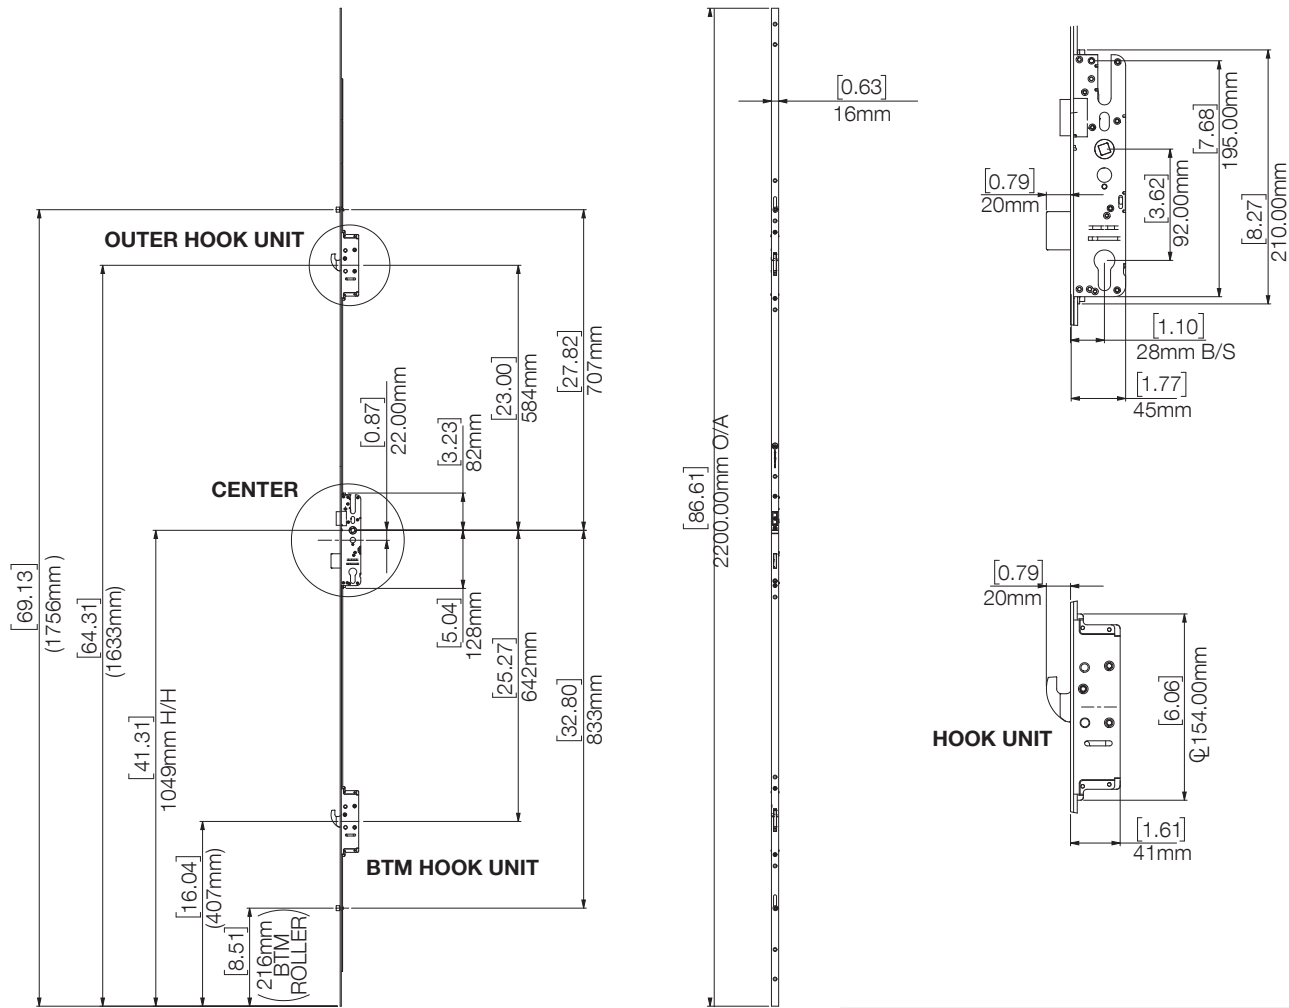

Min Dimension inc. Shootbolt 2227mm [87.68]
Max Dimension inc. Shootbolt 1869mm [73.58]

Note: 28mm backset Hook and Roller, 16mm faceplate illustrated

Packaging Specification:

Locks
5 Locks per box
250 Locks per crate

Maintenance

Yale recommends that all moving components are lubricated using a non-acidic mineral oil at least twice a year and surface cleaned with a damp cloth. The product may need to be adjusted to ensure satisfactory operation.

Material Specification:

Lock Case: Galvanized Steel
Faceplate: SS304
Connecting Rods: Galvanized Steel
Strikes: SS304/GS





Lockmaster AutoEngage (6' 8" & 8') Range

Features




- AutoEngage key retract locking mechanism
- Security latches automatically fire upon closure offering 20mm deadbolt engagement
- Easily reversible latch bolt and security latches to minimize stock requirements
- SS304 Deadbolt Center with babysitter function as standard
- Snib feature to allow hold back, preventing accidental lock out
- 35mm, 45mm, 55mm and 65mm backset options
- Sprung gearbox with PZ92mm center with elongated slot to accommodate trim set range
- 304 Stainless Steel 16mm faceplate options offering high corrosion resistance
- Designed to be compatible with a wide range of decorative furniture sets, including a full range of SS316 Bar handles and cylinder escutcheons
- Yale branded

Specification

- BS EN 1670:2007 Grade 5
- Tested to a minimum of 100,000 cycles
- Made in Britain
- 10 year guarantee

Optional Extras

- Full range of adjustable SS304 strikes available
- Full range of SS316 Bar handles and cylinder escutcheon




Part No.	Description	Backset	Max Overall Length	Handle Height	Outer Latch	Top Latch	Bottom Latch
YAS1-4508-60	AutoEngage, 2 Linear Bolt, 6' 8", 16mm face-plate Round Ended, SS304	45mm	1590mm (62.60")	915mm (36.00")	-	743mm (29.24")	592mm (23.32")
YAS1-4509-60	AutoEngage, 3 Linear Bolt, 8', 16mm faceplate Round Ended, SS304	45mm	2438mm (96.00")	1050mm (41.34")	1417mm (55.79")	743mm (29.24")	592mm (23.32")
YAS1-4510-60	AutoEngage, 3 Linear Bolt, 8', 16mm faceplate Round Ended, SS304	45mm	2438mm (96.00")	1050mm (41.34")	1417mm (55.79")	1053mm (41.44")	592mm (23.32")

Strikes

Part No.	Description	Part No.	Backset	Part No.	Backset	Part No.	Backset
PLK969-60	Adjustable Timber Center Strike, Left Hand, SS304	YAS1-3508-60	35mm	YAS1-5508-60	55mm	YAS1-6508-60	65mm
PLK970-60	Adjustable Timber Center Strike, Right Hand, SS304	YAS1-3509-60	35mm	YAS1-5509-60	55mm	YAS1-6509-60	65mm
PLK971-60	Adjustable Timber Center Strike, Extended, Left Hand, SS304	YAS1-3510-60	35mm	YAS1-5510-60	55mm	YAS1-6510-60	65mm
PLK972-60	Adjustable Timber Center Strike, Extended, Right Hand, SS304						
SPLK965-60	Adjustable Auxiliary Latch Strike, SS304	Note: All other dimensions see table above					

Additional Backset Part No.'s:

Technical Drawing

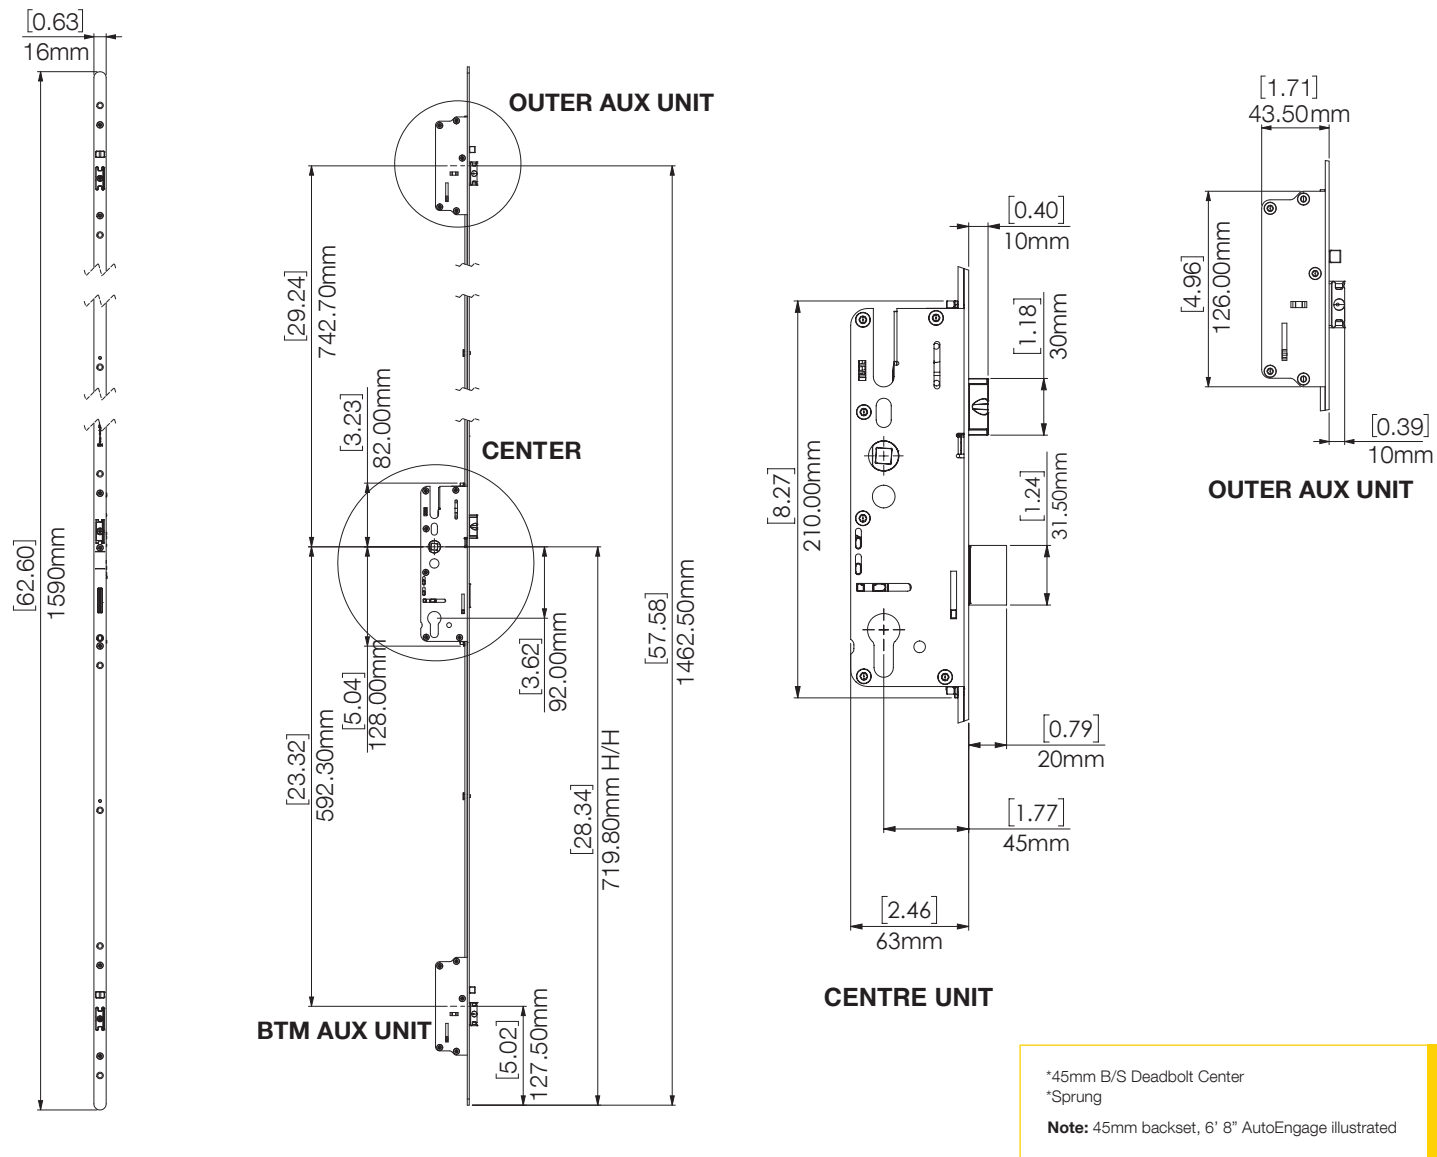

Packaging Specification:

Locks
5 Locks per box
250 Locks per crate

Maintenance

Yale recommends that all moving components are lubricated using a non-acidic mineral oil at least twice a year and surface cleaned with a damp cloth. The product may need to be adjusted to ensure satisfactory operation.


Material Specification:

Lock Case: Galvanized Steel
Faceplate: SS304
Connecting Rods: Galvanized Steel
Strikes: SS304




Adjustable Striker Range


Suitable for Timber System Application
Adjustable Center Strike:

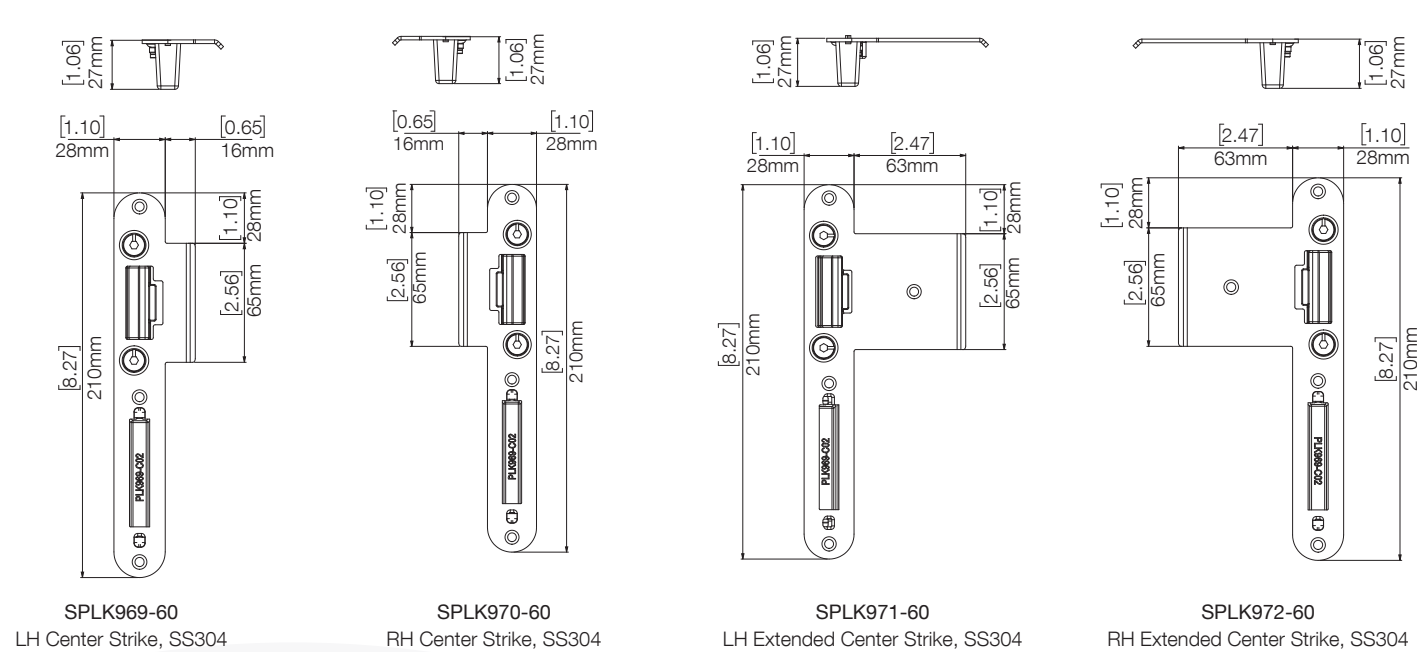


Adjustable Hook/Tongue/Auxiliary
Latch Strike:

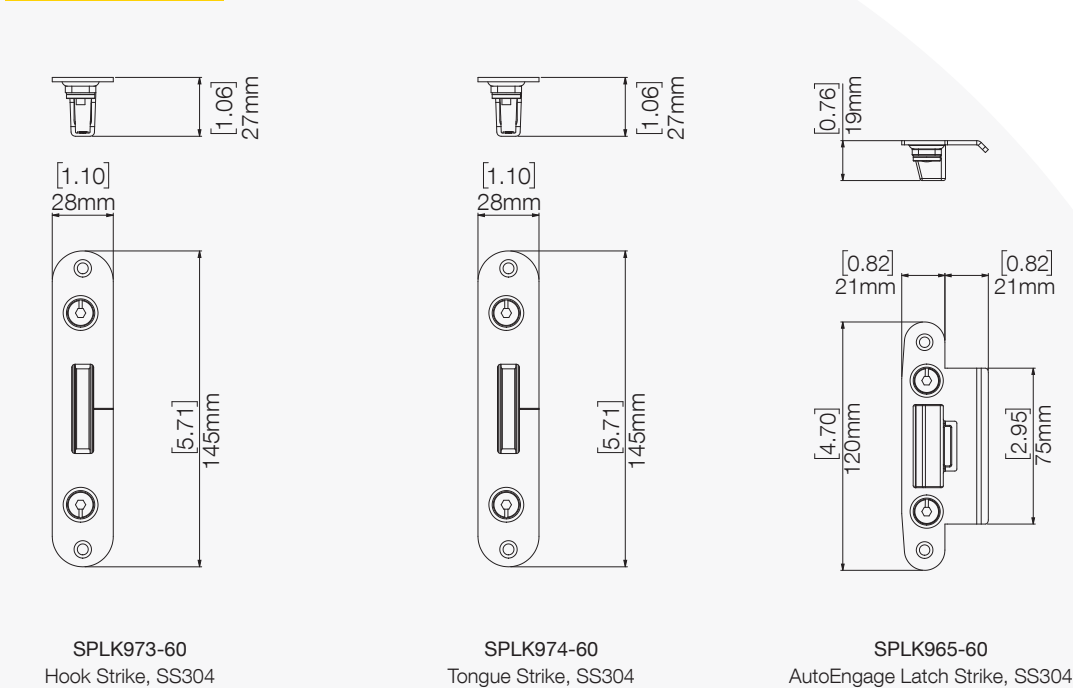

Suitable for Vinyl and Aluminum System Application
Adjustable Center Strike:

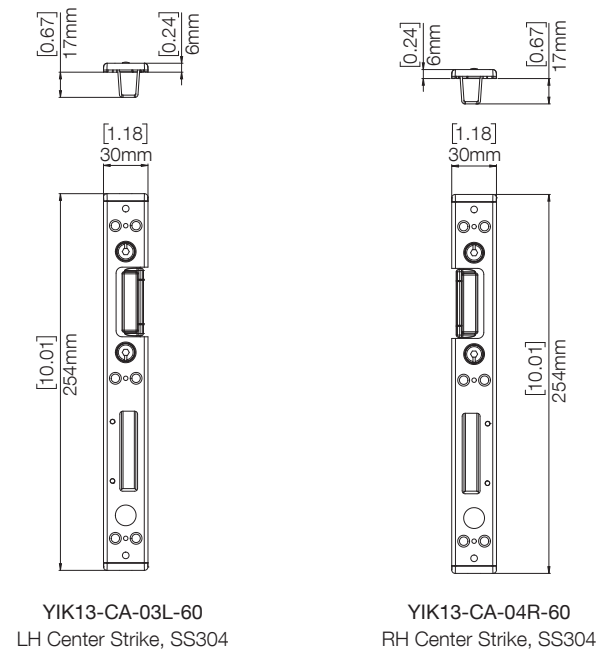


Adjustable Hook/Hook & Roller Strike:

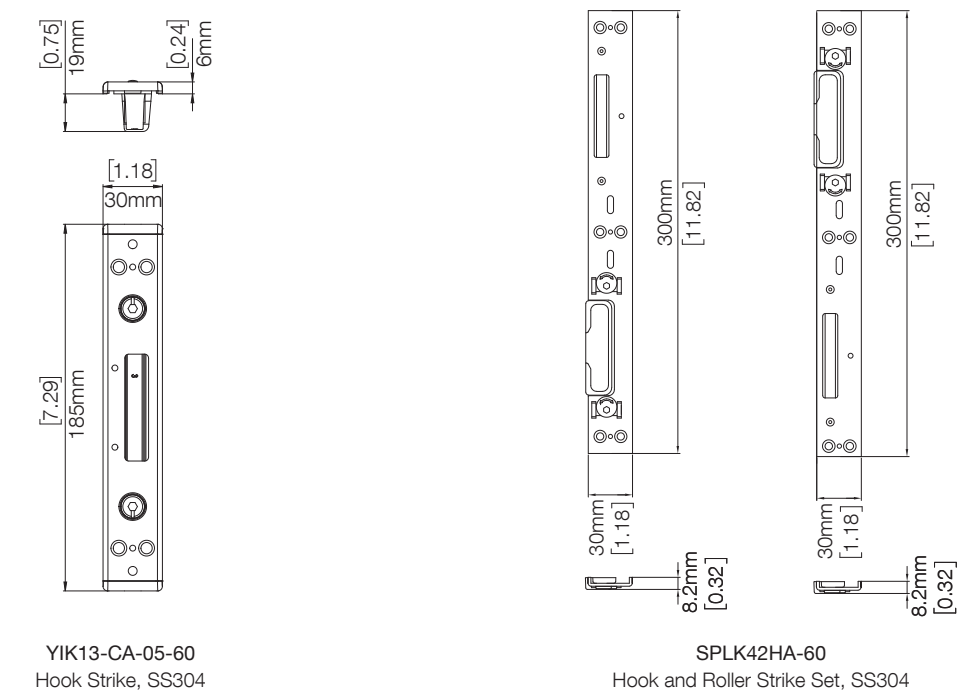


Extension Piece Range


Suitable for Timber/Vinyl System Application
16mm (0.63") Extension Piece:

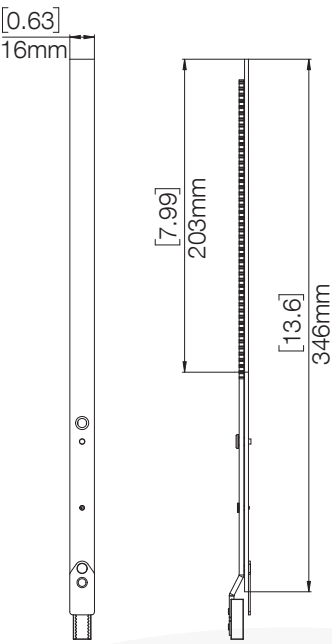


SPL2480-104
Stud Extension, Brushed SS304

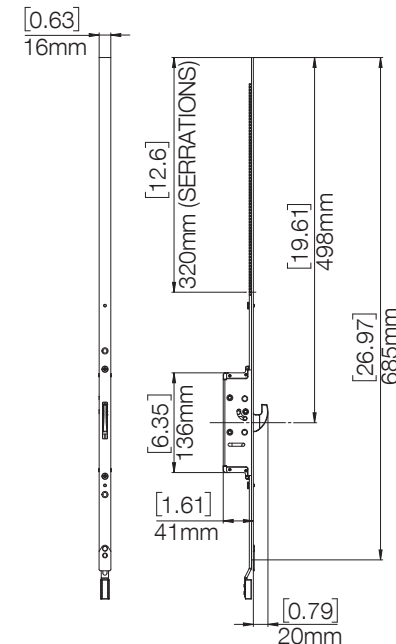

SPL2480HK-104
Hook Extension, Brushed SS304

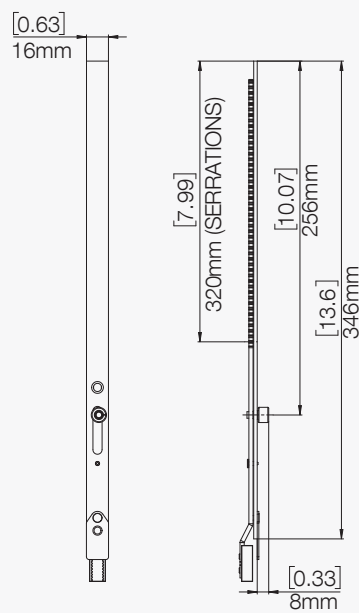


SPL2480R-104
Roller Extension, Brushed SS304

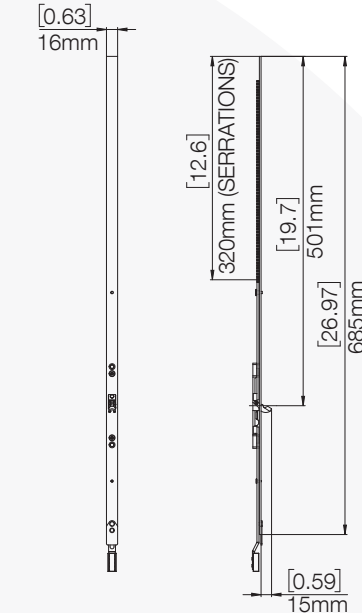


SPL2480TG-104
Tongue Extension, Brushed SS304


Suitable for Timber/Vinyl System Application
20mm (0.78") Extension Piece:

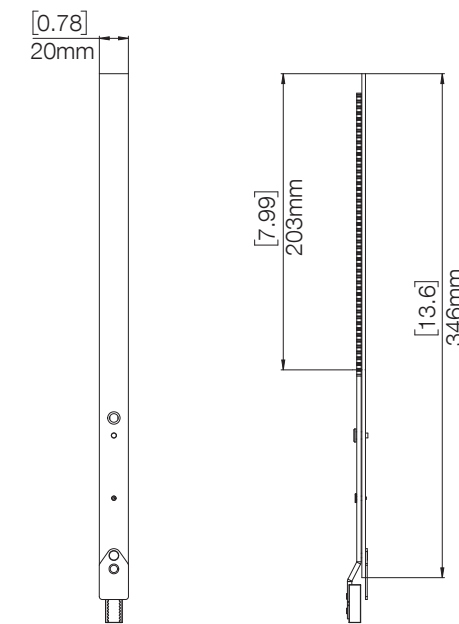


SPL2481-104
Stud Extension, Brushed SS304

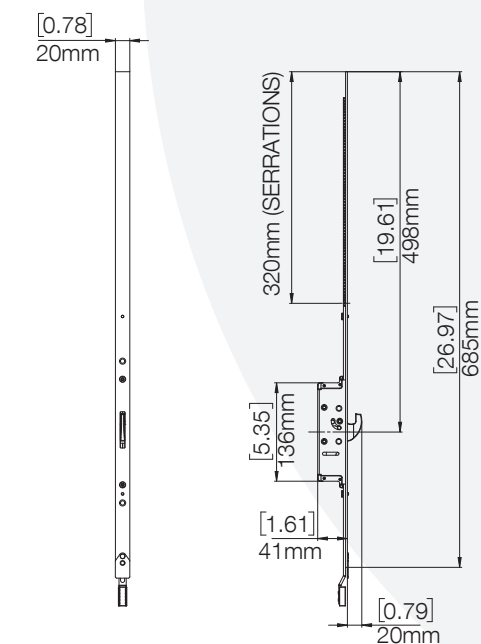

SPL2481HK-104
Hook Extension, Brushed SS304

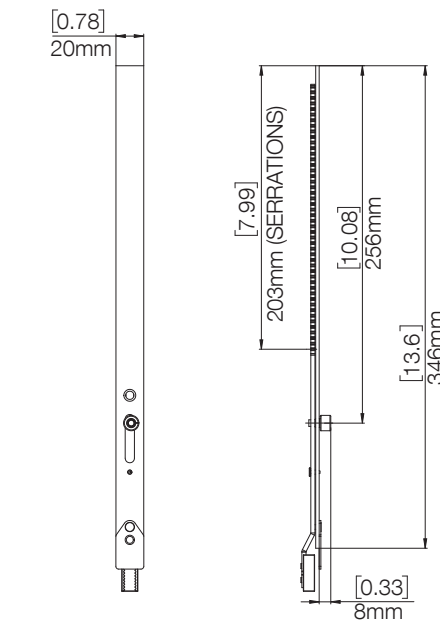


SPL2481R-104
Roller Extension, Brushed SS304

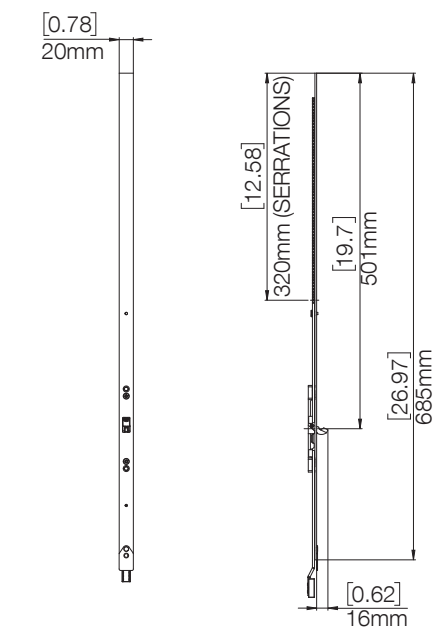

SPL2481TG-104
Tongue Extension, Brushed SS304


Extension Range

Suitable for Timber/Aluminum System Application
24mm (0.95") Extension Piece:

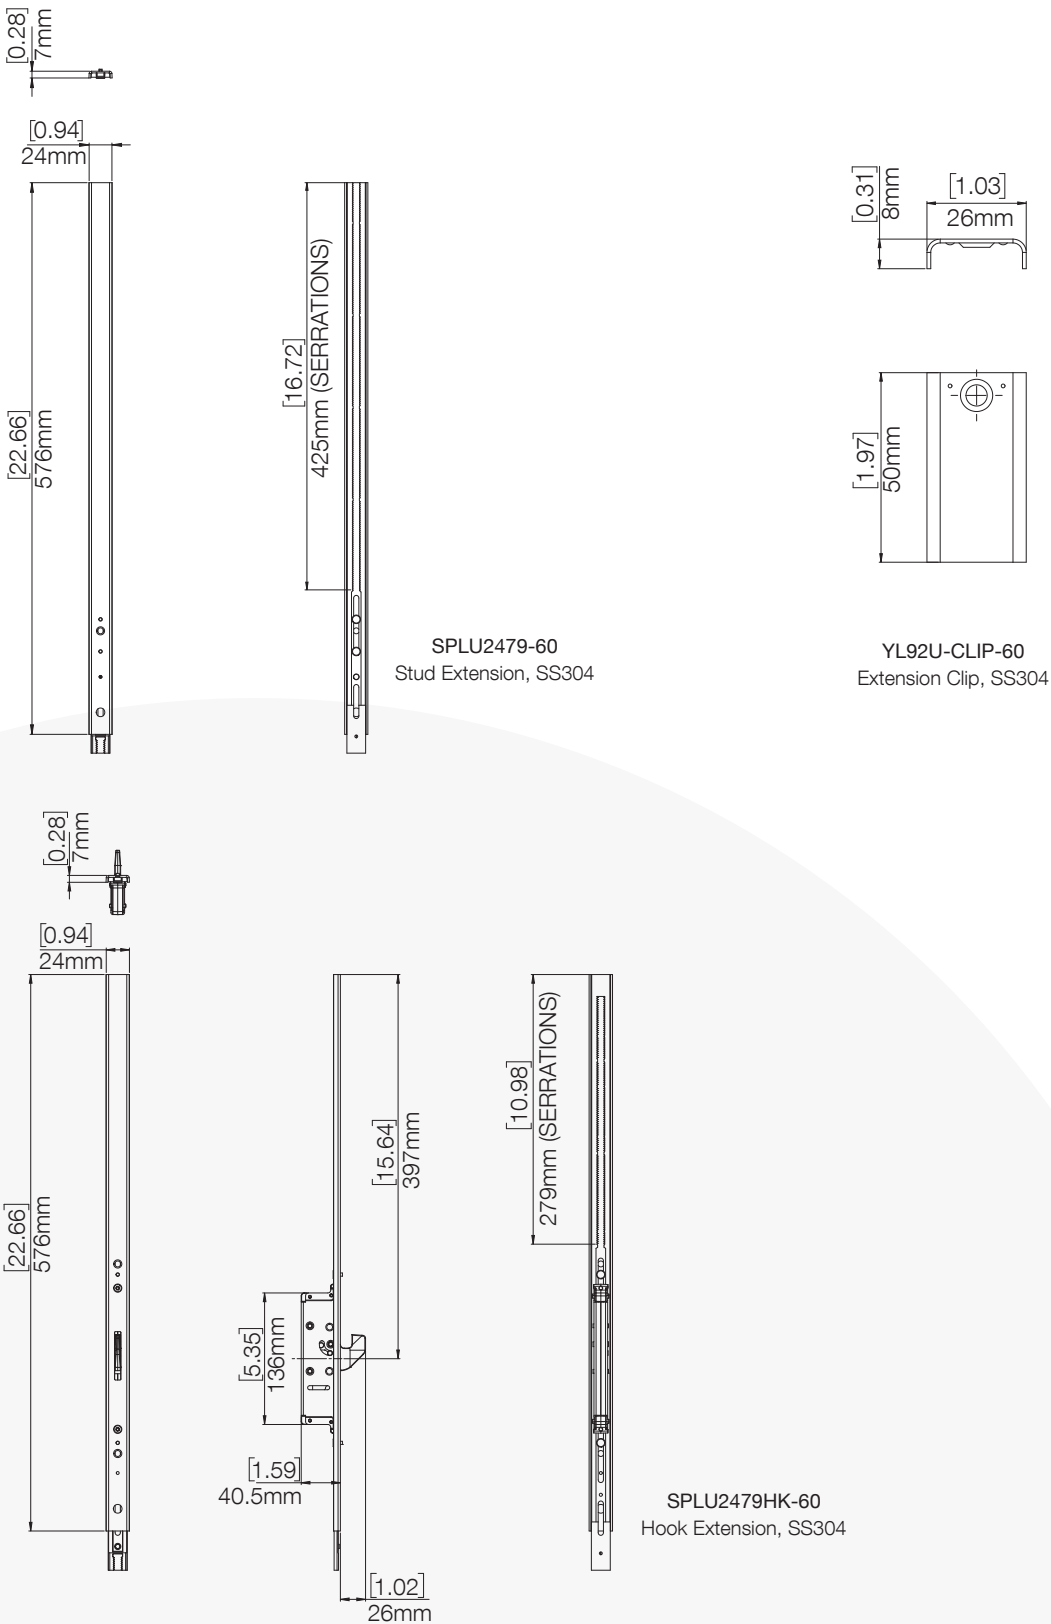


Shootbolt Range


Suitable for Timber/Vinyl System Application 16mm (0.63") Shootbolt:

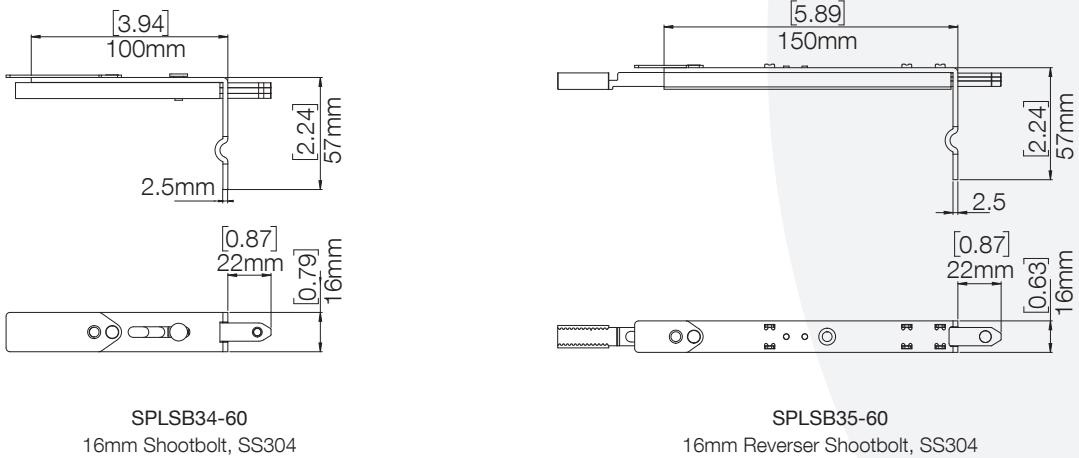

Suitable for Timber/Vinyl System Application 20mm (0.78") Shootbolt:

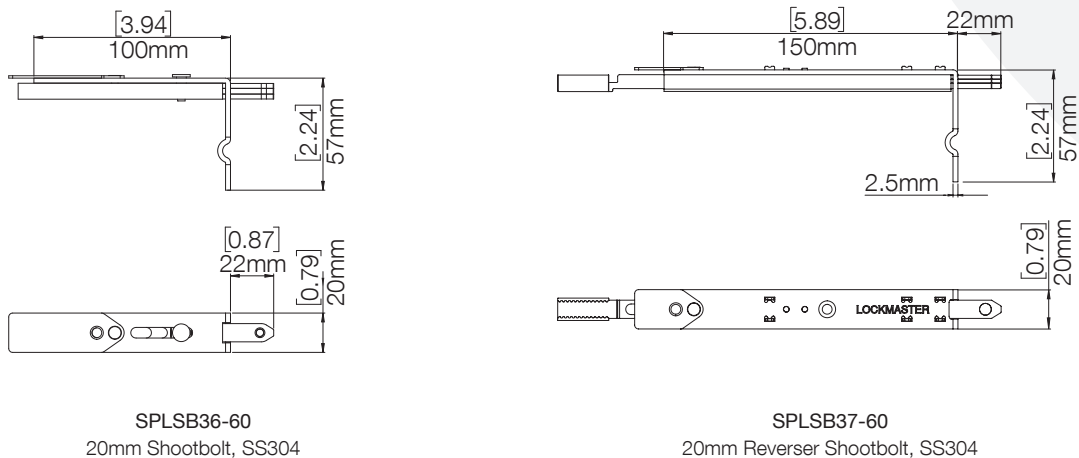

Suitable for Timber/Vinyl System Application Shootbolt Strike:

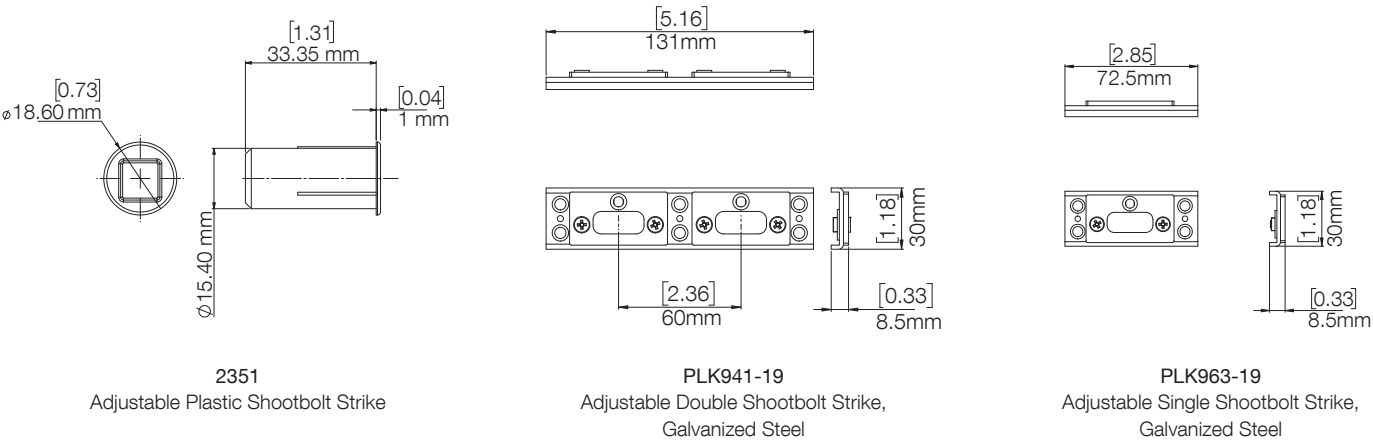



Athena Door Hinge Range

Features

- Slim sightline door hinge which offers a slim, aesthetically pleasing design with an unobtrusive appearance
- 2D and 3D options available
- Compression, height and lateral adjustment achievable with door closed (Full Float Technology for visual alignment)
- No unsightly gaps visible following adjustment
- Double knuckle construction for increased load bearing
- Combined carrying weight (3 Hinges) of 150kg (331lbs)
- Fitter and installer friendly (Lift On, Lift Off door design)
- One product fits all standard Eurogroove systems
- Available in various RAL and PVD finishes
- Integral interlocking security hooks available
- Patented unique design



Specifications:

- Zinc alloy
- Stainless Steel - Grade 430 and 304 options available
- Plastic - GF Nylon, UV stabilised ABS and Acetyl
- Corrosion tested to BS EN 1670
- Painted finishes Grade 5, plated finishes Grade 4; alternatively 1,000 hours anti-corrosion on special painted finishes
- Conforms to EN 1191 - tested to 100,000 cycles
- 3D adjustment:
 - Height +/- 4mm
 - Compression +/- 2mm
 - Lateral +/- 4mm
 - 3 hinges carry 150kg (331lbs)
- 10 year guarantee

Maintenance:

Yale recommends that all moving components are lubricated using a non-acidic mineral oil at least twice a year and surface cleaned with a damp cloth. The product may need to be adjusted to ensure satisfactory operation.




Part No.	3D Athena Door Hinge – Vinyl Application
0713-2000-AG	Athena 3D Door Hinge Anthracite Grey
0713-2000-BR	Athena 3D Door Hinge Brown
0713-2000-CG	Athena 3D Door Hinge Champagne Gold
0713-2000-CH	Athena 3D Door Hinge Chrome
0713-2000-OAK	Athena 3D Door Hinge Oak
0713-2000-SB	Athena 3D Door Hinge Satin Black
0713-2000-SL	Athena 3D Door Hinge Satin Silver
0713-2000-WH	Athena 3D Door Hinge White
Part No.	2D Athena Door Hinge – Timber Application
0713-2003-AG	Athena 2D Door Hinge Anthracite Grey
0713-2003-BR	Athena 2D Door Hinge Brown
0713-2003-CG	Athena 2D Door Hinge Champagne Gold
0713-2003-CH	Athena 2D Door Hinge Chrome
0713-2003-OAK	Athena 3D Door Hinge Oak
0713-2003-SB	Athena 2D Door Hinge Satin Black
0713-2003-SL	Athena 2D Door Hinge Satin Silver
0713-2003-WH	Athena 2D Door Hinge White
Part No.	3D Athena Stainless Steel Door Hinge – Vinyl Application
0723-3000-BS	Athena 3D Door Hinge, 304 Brushed Stainless Steel
0723-3000-PS	Athena 3D Door Hinge, 304 Polished Stainless Steel

Door Handle Range


Features

- Available in USA and euro profile cylinder options
- Active, inactive and dummy variants to suit single and double door applications
- Available in White, Black, Silver & ORB - Matt finishes. Color coded screw heads for aesthetic finishes
- Innovative, easy to fit lever with weatherproof gaskets
- Easy to cut key blanks
- Screw packs to suit 1¾” and 2¼” doors

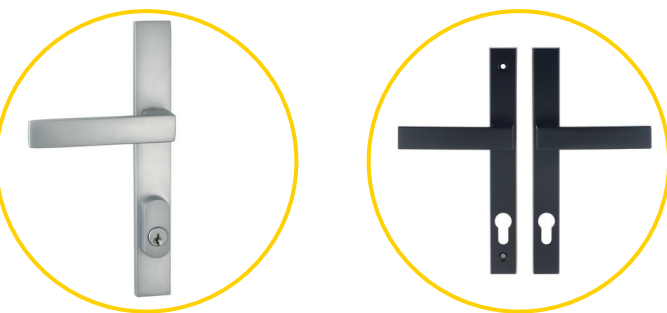

Specifications:


- Zinc alloy
- Mechanically load tested to 30Nm
- BS EN 1670:2007 Grade 5
- Tested to a minimum of 100,000 cycles
- Made in Britain
- 10 year guarantee

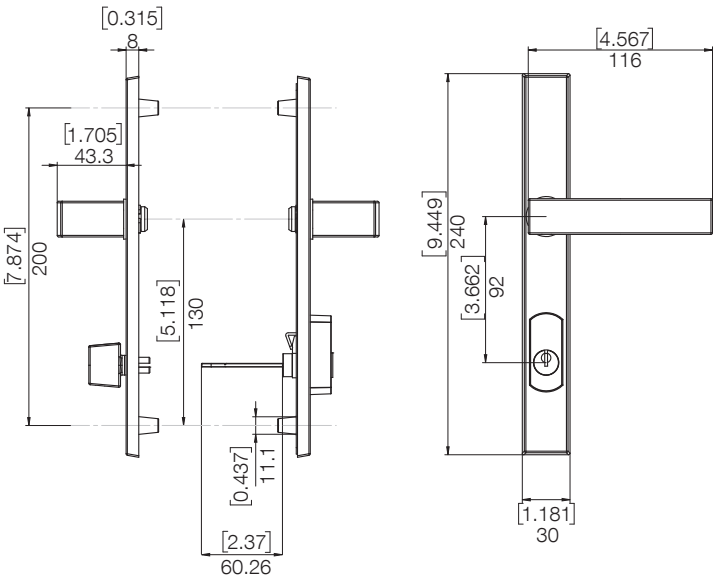

Part No.	Description
DH01-6000-BK	Ferraro Active Tailbar Door Handle, Black
DH01-6000-ORB	Ferraro Active Tailbar Door Handle, ORB
DH01-6000-SL	Ferraro Active Tailbar Door Handle, Satin Silver
DH01-6000-WH	Ferraro Active Tailbar Door Handle, White
DH01-6001-BK	Ferraro Active Euro Profile Door Handle, Black
DH01-6001-ORB	Ferraro Active Euro Profile Door Handle, ORB
DH01-6001-SL	Ferraro Active Euro Profile Door Handle, Satin Silver
DH01-6001-WH	Ferraro Active Euro Profile Door Handle, White
DH01-6002-BK	Ferraro Inactive Door Handle, Black
DH01-6002-ORB	Ferraro Inactive Door Handle, ORB
DH01-6002-SL	Ferraro Inactive Door Handle, Satin Silver
DH01-6002-WH	Ferraro Inactive Door Handle, White
DH01-6003-BK	Ferraro Dummy Door Handle, Black
DH01-6003-ORB	Ferraro Dummy Door Handle, ORB
DH01-6003-SL	Ferraro Dummy Door Handle, Satin Silver
DH01-6003-WH	Ferraro Dummy Door Handle, White

Maintenance:

Yale recommends that all moving components are lubricated using a non-acidic mineral oil at least twice a year and surface cleaned with a damp cloth. The product may need to be adjusted to ensure satisfactory operation.

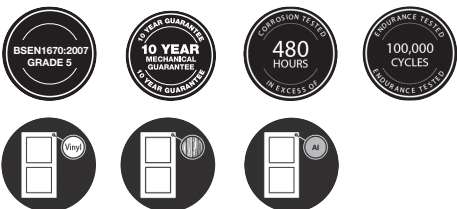




Elite T Bar / Contemporary Handle

Features

- Suites perfectly with Elite Stainless Steel furniture for a totally coordinated, modern door style
- Inline and cranked options available in varying lengths
- Choice of fixing methods available:
 - Back to back - one pull handle both sides of the door
 - Bolt fixing - one pull handle with cover caps on the opposite side of the door
- Produced from 1.2mm material thickness
- Fixing pegs supplied with a machined brass insert as standard
- M8 bolt has the option of a clear washer to protect the door face
- 300-1800mm (11.81" - 70.87")
- Available in brushed polished 316 stainless steel or RAL finishes
- 316 Stainless Steel
- 10 year guarantee

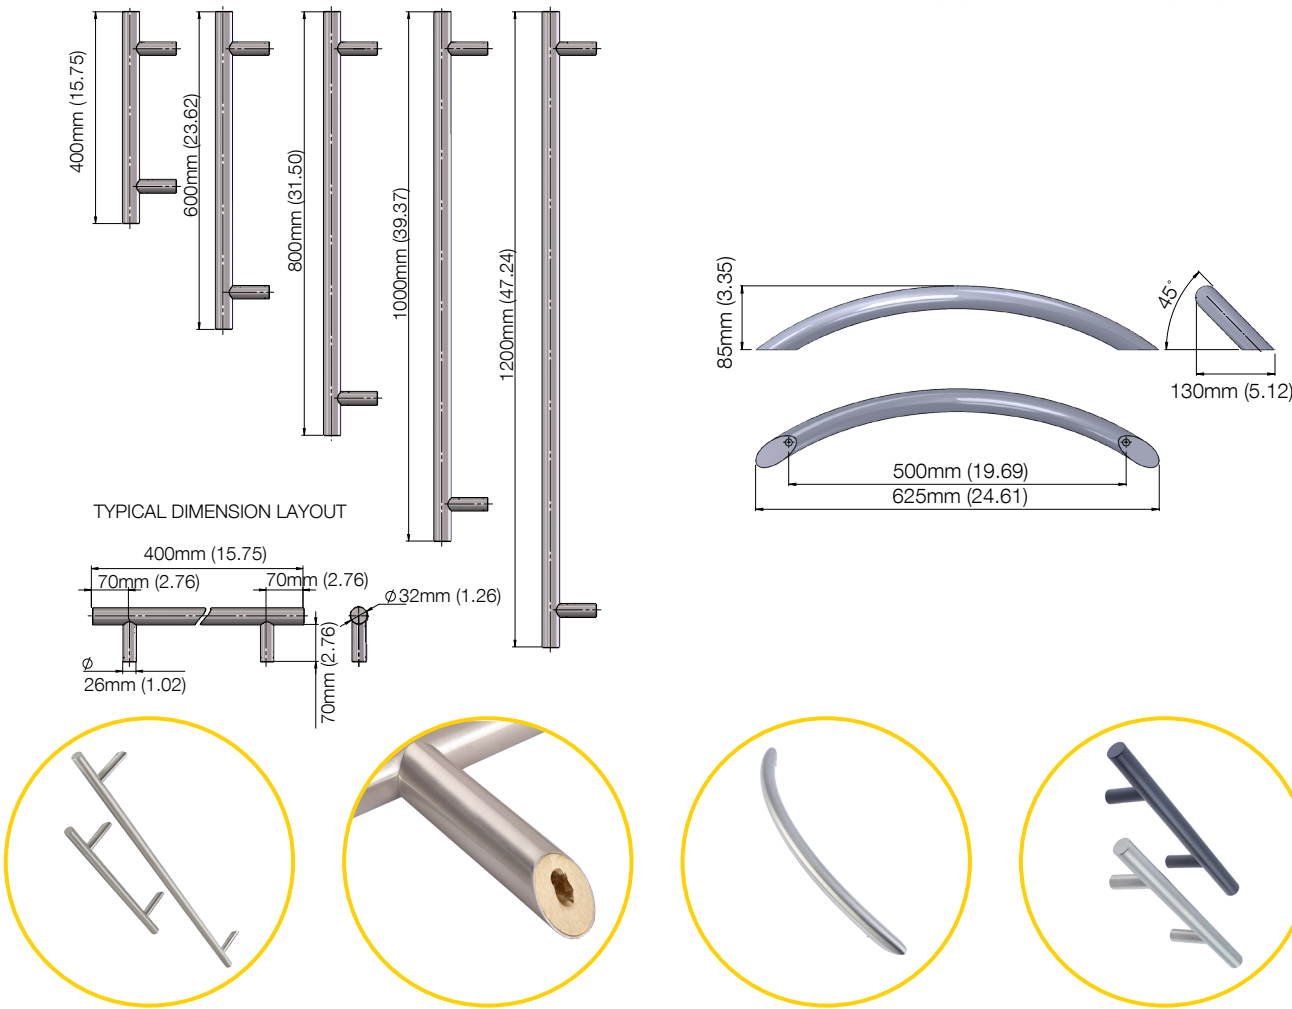

Pair Part No.	Single Part No.	Inline T Bar Handle
1TBH000-BS	2TBH000-BS	300mm (11.81) Inline T Bar Handle, Brushed 316 Stainless Steel
1TBH000-ORB	2TBH000-ORB	300mm (11.81) Inline T Bar Handle, 316 SS; Oil Rubbed Bronze
1TBH001	2TBH001	400mm (15.75) Inline T Bar Handle, Polished 316 Stainless Steel
1TBH001-BS	2TBH001-BS	400mm (15.75) Inline T Bar Handle, Brushed 316 Stainless Steel
1TBH002	2TBH002	600mm (23.62) Inline T Bar Handle, Polished 316 Stainless Steel
1TBH002-BS	2TBH002-BS	600mm (23.62) Inline T Bar Handle, Brushed 316 Stainless Steel
1TBH003	2TBH003	800mm (31.50) Inline T Bar Handle, Polished 316 Stainless Steel
1TBH003-BS	2TBH003-BS	800mm (31.50) Inline T Bar Handle, Brushed 316 Stainless Steel
1TBH003-ORB	2TBH003-ORB	800mm (31.50) Inline T Bar Handle, 316 SS; Oil Rubbed Bronze
1TBH004	2TBH004	1000mm (39.37) Inline T Bar Handle, Polished 316 Stainless Steel
1TBH004-BS	2TBH004-BS	1000mm (39.37) Inline T Bar Handle, Brushed 316 Stainless Steel
1TBH005	2TBH005	1200mm (47.24) Inline T Bar Handle, Polished 316 Stainless Steel
1TBH005-BS	2TBH005-BS	1200mm (47.24) Inline T Bar Handle, Brushed 316 Stainless Steel
1TBH006	2TBH006	1500mm (59.06) Inline T Bar Handle, Polished 316 Stainless Steel
1TBH006-BS	2TBH006-BS	1500mm (59.06) Inline T Bar Handle, Brushed 316 Stainless Steel
1TBH006-ORB	2TBH006-ORB	1500mm (59.06) Inline T Bar Handle, 316 SS; Oil Rubbed Bronze
1TBH007	2TBH007	1800mm (70.87) Inline T Bar Handle, Polished 316 Stainless Steel
1TBH007-BS	2TBH007-BS	1800mm (70.87) Inline T Bar Handle, Brushed 316 Stainless Steel

Pair Part No.	Single Part No.	Cranked T Bar Handle
3TBH000-BS	4TBH000-BS	300mm (11.81) Cranked T Bar Handle, Brushed 316 Stainless Steel
3TBH000-ORB	4TBH000-ORB	300mm (11.81) Cranked T Bar Handle, 316 SS; Oil Rubbed Bronze
3TBH001	4TBH001	400mm (15.75) Cranked T Bar Handle, Polished 316 Stainless Steel
3TBH001-BS	4TBH001-BS	400mm (15.75) Cranked T Bar Handle, rushed 316 Stainless Steel
3TBH002	4TBH002	600mm (23.62) Cranked T Bar Handle, Polished 316 Stainless Steel
3TBH002-BS	4TBH002-BS	600mm (23.62) Cranked T Bar Handle, Brushed 316 Stainless Steel
3TBH003	4TBH003	800mm (31.50) Cranked T Bar Handle, Polished 316 Stainless Steel
3TBH003-BS	4TBH003-BS	800mm (31.50) Cranked T Bar Handle, Brushed 316 Stainless Steel
3TBH003-ORB	4TBH003-ORB	800mm (31.50) Cranked T Bar Handle, 316 SS; Oil Rubbed Bronze
3TBH004	4TBH004	1000mm (39.37) Cranked T Bar Handle, Polished 316 Stainless Steel
3TBH004-BS	4TBH004-BS	1000mm (39.37) Cranked T Bar Handle, Brushed 316 Stainless Steel
3TBH005	4TBH005	1200mm (47.24) Cranked T Bar Handle, Polished 316 Stainless Steel
3TBH005-BS	4TBH005-BS	1200mm (47.24) Cranked T Bar Handle, Brushed 316 Stainless Steel
3TBH006	4TBH005	1500mm (59.06) Cranked T Bar Handle, Polished 316 Stainless Steel
3TBH006-BS	4TBH005-BS	1500mm (59.06) Cranked T Bar Handle, Brushed 316 Stainless Steel
3TBH007	4TBH005	1800mm (70.87) Cranked T Bar Handle, Polished 316 Stainless Steel
3TBH007-BS	4TBH005-BS	1800mm (70.87) Cranked T Bar Handle, Brushed 316 Stainless Steel

Timber Kit	Vinyl Kit	Bolt Fixing Kits for Paired T Bar Handle
KIT-BTB001	KIT-BTB005	Inline Bolt Fixing Kit 400-1200mm (15.75 - 47.24) Pair of Handles
KIT-BTB002	KIT-BTB007	Inline Bolt Fixing Kit 1500-1800mm (59.06 - 70.87) Pair of Handles
KIT-BTB003	KIT-BTB006	Cranked Bolt Fixing Kit 400-1200mm (15.75 - 47.24) Pair of Handles
KIT-BTB004	KIT-BTB008	Cranked Bolt Fixing Kit 1500-1800mm (59.06 - 70.87) Pair of Handles

Timber Kit	Vinyl Kit	Bolt Fixing Kits for Single T Bar Handle
KIT-BTB001	KIT-BTB005	Inline Bolt Fixing Kit 400-1200mm (15.75 - 47.24) Pair of Handles
KIT-BTB002	KIT-BTB007	Inline Bolt Fixing Kit 1500-1800mm (59.06 - 70.87) Pair of Handles
KIT-BTB003	KIT-BTB006	Cranked Bolt Fixing Kit 400-1200mm (15.75 - 47.24) Pair of Handles
KIT-BTB004	KIT-BTB008	Cranked Bolt Fixing Kit 1500-1800mm (59.06 - 70.87) Pair of Handles

Pair Part No.	Single Part No.	Bow Handle
1BOW625BTB	1BOW625BFX	625mm (24.61) Bow Handle, Brushed 316 Stainless Steel
2BOW1200BTB	2BOW1200BFX	1200mm (47.24) Bow Handle, Brushed 316 Stainless Steel

Maintenance:





Yale recommends that all moving components are lubricated using a non-acidic mineral oil at least twice a year and surface cleaned with a damp cloth. The product may need to be adjusted to ensure satisfactory operation.



Euro Profile Cylinder Range

Features

- Replacement 6 pin Euro Profile Cylinder
- Anti-Bump, Anti-Pick and Anti-Drill protection
- Available in polished brass and nickel plated finishes
- Available in Euro Double and Euro Thumbturn
- 3 keys supplied

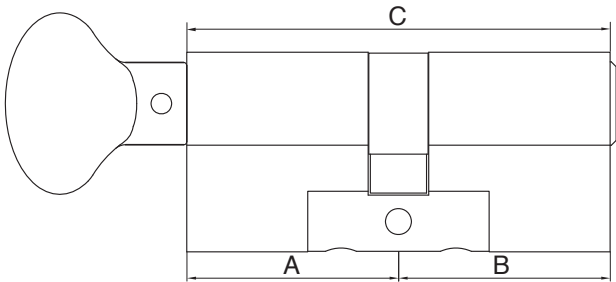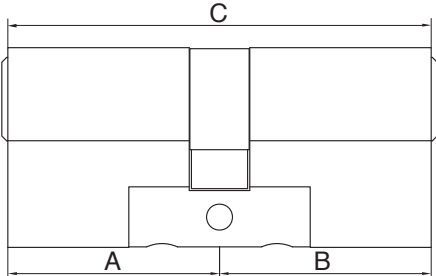

Double Cylinder Part No.	Thumbturn Cylinder Part No.	A	B	C	Finish
KM3030-NP	KMT3030-NP	30	30	70	Nickel Plated
KM3030-PB	KMT3030-PB	30	30	70	Polished Brass
KM3035-NP	-	30	35	75	Nickel Plated
KM3035-PB	-	30	35	75	Polished Brass
KM3040-NP	KMT3040-NP	30	40	80	Nickel Plated
KM3040-PB	-	30	40	80	Polished Brass
KM3045-PB	KMT3045-PB	30	45	85	Polished Brass
KM3050-NP	KMT3050-NP	30	45	90	Nickel Plated
KM3535-NP	KMT3535-NP	35	35	80	Nickel Plated
KM3535-PB	KMT3535-PB	35	35	80	Polished Brass
KM3540-NP	KMT3540-NP	35	40	85	Nickel Plated
KM3540-PB	KMT3540-PB	35	40	85	Polished Brass
KM3545-NP	KMT3545-NP	35	45	90	Nickel Plated
KM3545-PB	KMT3545-PB	35	45	90	Polished Brass
KM3550-NP	KMT3550-NP	35	50	95	Nickel Plated
KM3550-PB	KMT3550-PB	35	50	95	Polished Brass
KM3555-NP	KMT3555-NP	35	55	100	Nickel Plated
KM3555-PB	KMT3555-PB	35	55	100	Polished Brass
KM4040-NP	KMT4040-NP	40	40	90	Nickel Plated
KM4040-PB	KMT4040-PB	40	40	90	Polished Brass
KM4045-NP	KMT4045-NP	40	45	95	Nickel Plated
KM4045-PB	KMT4045-PB	40	45	95	Polished Brass
KM4050-NP	KMT4050-NP	40	50	95	Nickel Plated
KM4050-PB	KMT4050-PB	40	50	100	Polished Brass
-	KMT4535-NP	45	35	90	Nickel Plated
-	KMT4535-PB	45	35	90	Polished Brass
-	KMT4540-NP	45	40	95	Nickel Plated
-	KMT4540-PB	45	40	95	Polished Brass
KM4545-NP	KMT4545-NP	45	45	100	Nickel Plated
KM4545-PB	KMT4545-PB	45	45	100	Polished Brass
KM4550-NP	KMT4550-NP	45	50	105	Nickel Plated
KM4550-PB	KMT4550-PB	45	50	105	Polished Brass
-	KMT5040-NP	50	40	100	Nickel Plated
-	KMT5040-PB	50	40	100	Polished Brass
-	KMT5045-NP	50	45	105	Nickel Plated

USA Cylinder Range

Features

- Replacement tail piece cylinder
- Flat tail piece with break away marks at 1/4" increments to adjust the length as required
- USA keyway
- Available in polished brass and nickel plated finishes
- 3 keys supplied

Part No.	Description
180260	USA Tail piece cylinder, Nickel Plated
180261	USA Tail piece cylinder, Brass Plated



Maintenance:

Yale recommends that all moving components are lubricated using a non-acidic mineral oil at least twice a year and surface cleaned with a damp cloth. The product may need to be adjusted to ensure satisfactory operation.



Smart Hardware – Conexis Smart Lock

Features

- Secure. Simple. Keyless. Revolutionary smart lock solution that allows you to control your door lock without a key from your smartphone and other accessories
- The Conexis® L1 smart lock is compatible with the Lockmaster ‘lift to lock’ multipoint lock range
- Use the access credential that suits you best. Use your Smartphone, key tag, key card, phone tag or key fob to access your home
- Send virtual keys to your loved ones and give temporary access to one time guests and visitors
- DIY Fit - Engineered for easy installation
- Battery powered with no wires. Battery back-up utilising a 9V battery connection port can be used to power the Conexis L1 if the batteries run flat
- Internal Thumbturn engineered for safety (emergency escape) convenience
- Remotely unlock your door and check if your door is locked or unlocked when connected to the Yale Home App
- Alexa compatible - Ask Alexa ‘is my front door locked?’ and she will confirm if the door is locked, unlocked or open
- Tested to TS621:2018 BSI Kitemark: The ultimate mark of security, the British Kitemark testing ensures both the mechanical and electronic security of smart products is of the highest standard.
- 2 year guarantee



Part No.	Description	Finish
SD-L1000-BL	Conexis L1 Smart Lock	Black
SD-L1000-CH	Conexis L1 Smart Lock	Chrome
SD-L1000-PB	Conexis L1 Smart Lock	Polished Brass
SD-L1000-SN	Conexis L1 Smart Lock	Satin Nickel
SD-L1000-WH	Conexis L1 Smart Lock	Matt White

Maintenance:

Yale recommends that all moving components are lubricated using a non-acidic mineral oil at least twice a year and surface cleaned with a damp cloth. The product may need to be adjusted to ensure satisfactory operation.

Glossary

Active Door Set:

Lockable Handle set – will include a cylinder.

Babysitter Function:

Independent locking of multipoint without the need to lift the door handle.

Backset:

Measurement from front face of lock to the center of the cylinder.

Cylinder:

Mechanical locking device added to gearbox. Used with key/thumbturn to lock a multipoint lock.

Deadbolt:

A bolt that moves in and out of the door frame to secure the door closed.

Extension:

Section of faceplate that can be added to end of existing door lock to increase the overall height of a door.

Faceplate:

Metal piece that runs down the edge of the door.

Gearbox:

The main body of the multipoint gear.

Handle Height:

Measurement from bottom of lock to center of handle spindle hole.

Hook:

High security steel hooks for anti separation, protects the door from being jemmied as they locate into the door frame.

Inactive Lock:

Multipoint lock with shootbolts only locking into the frame.

Latchbolt:

The catch on the door; can be reversed to change door opening.

Mishandling Device:

Anti-Slam mishandling device; prevents multiple locking points from accidentally extending and potentially damaging door frame.

Roller:

Adjustable roller designed to enhance compression performance and maximise weathersealing.

Shootbolt:

Section of faceplate with return that can be added to ends of existing door lock to offer additional security into the frame.

Spindle:

Length of square steel bar which connects two door handles together on either side of a door.

Striker:

Adjustable plates that the locking features of the door lock locate and secure into.


Throw:


Measurement of the travel of a locking point from faceplate to end of locking feature.


Tongue:


Locking point that secures the door into the frame.


Glossary


- 


BS EN 1670 Grade 5
British Standards Institute accredited
anti-corrosion performance
- 


10 Year Mechanical Guarantee
Delivering peace of mind from the world's
favorite lock company
- 


Mechanically load tested
Mechanically load tested to 30Nm
- 


Corrosion tested
Corrosion tested in excess of 480 hours
- 

Made in Britain
British manufacturing by encouraging
and developing the supply chain of
UK made goods
- 

Endurance Tested
Endurance tested to 100,000 cycles
- 

Suitable for Timber Application
- 

Suitable for Aluminum Application
- 

Suitable for Vinyl Application
- 

RAL Colors
The door handle and hinge range is
available in a variety of color variations

That’s why we proudly
say that Yale is “**the
world’s favorite lock**”.

